


# NSS607 Series


## Features

- Auto return type.



Rating	DC4V 0.3A
Stroke	2.7 ± 0.3 mm
Contact Resistance	70mΩ max.
Insulation Resistance	DC100V-100MΩ min.
Withstand Voltage	AC100V - 1 minute

### Recommended Reflow Soldering Profile



### Recommended Manual Soldering Profile

	Temperature	Time
Manual Soldering Temperature	350 °C (max.)	3 Sec.(max.)

The solder iron and solder shall be applied at a distance of 1.91 mm to 2.54 mm from the plastic housing.

Durability 10,000 cycles

### SMT - G Type Horizontal 1 Pole 2 Positions

11.0L x 3.5W x 2.0H

### Outline Drawing



Product No.	Package
NSS607-212N-EEEG1T	1,800 Pcs/Reel

### Specifications

Timing	Non-Shorting
Operating Force	180 ± 70gf

### Schematic

### P.C.B Layout

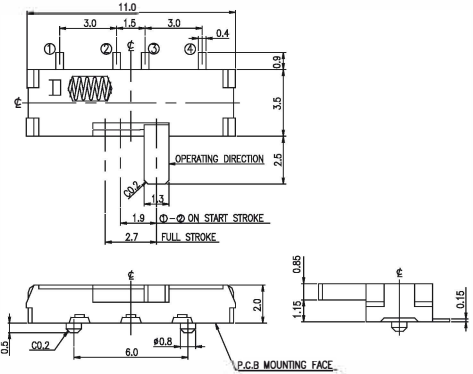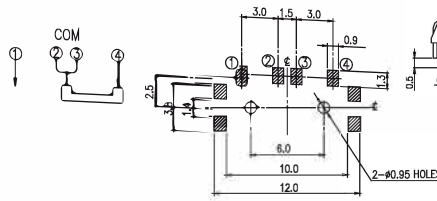

General Tolerance : ±0.2mm.

### SMT - G Type Horizontal 1 Pole 2 Positions

11.0L x 3.5W x 2.0H

### Outline Drawing



Product No.	Package
NSS607-212N-DEHG1T	1,800 Pcs/Reel

### Specifications

Timing	Non-Shorting
Operating Force	180 ± 70gf

### Schematic

### P.C.B Layout

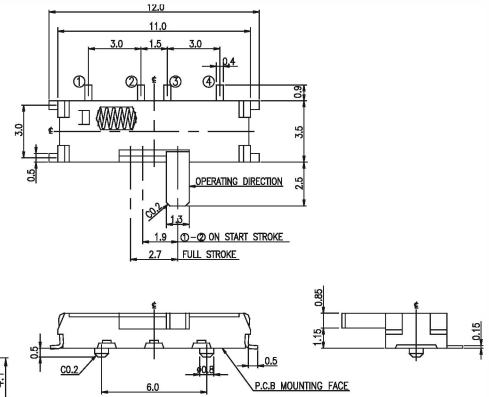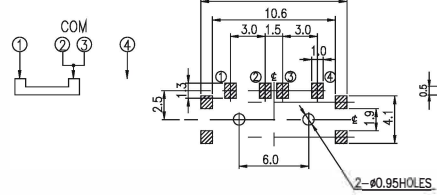

General Tolerance : ±0.2mm.

### SMT - G Type Horizontal 1 Pole 2 Positions

11.0L x 3.5W x 2.0H

### Outline Drawing



Product No.	Package
NSS607-212N-BAAG1T	2,000 Pcs/Reel

### Specifications

Timing	Non-Shorting
Operating Force	180 ± 70gf

### Schematic

### P.C.B Layout

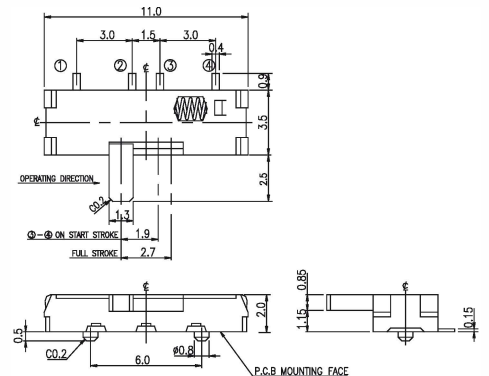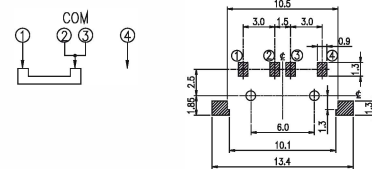

General Tolerance : ±0.2mm.



■ SMT - G Type Horizontal 11.0L x 3.5W x 2.0H ■ Outline Drawing  
1 Pole 2 Positions

Product No.	Operating Force	Timing	Package
NSS607-212N-FEEG1T	180 ±70gf	Non-Shorting	1,800 Pcs/Reel
NSS607-212N-FEFG1T	250 ±80gf		

Schematic



P.C.B Layout

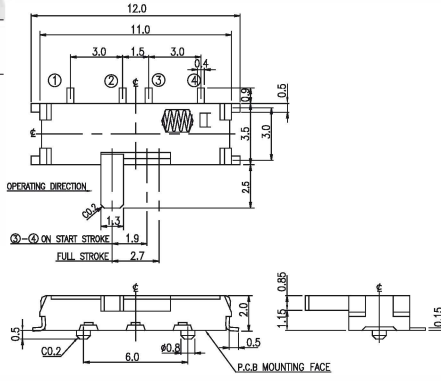

General Tolerance : ±0.2mm.

