


TACT SWITCH DISD-(G)MWTC06

6x6 Gull-Wing SMT
Washable Type IP67

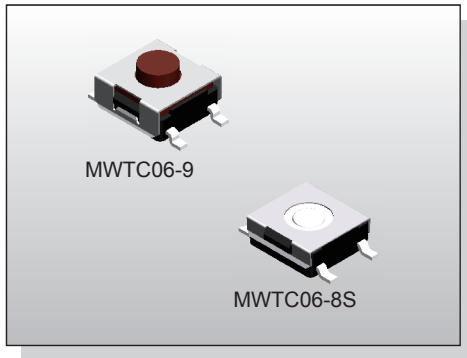

FEATURES

- ✘ Sealed IP67
- ✘ Dust proof with high reliability
- ✘ Reflow solderable

APPLICATION

- ✘ Audio, OA equipment
- ✘ Instrumentation, communication
- ✘ White goods

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	160gf±50gf, Brown(N) 06-6 160gf±50gf, Silver(S) 06-8 180gf±50gf, Brown(N) 06-9/7/5/4/77 260gf±70gf, Red(R) 06-9/7/6/5/4 360gf±70gf, Transparent(T):06-9/7/5/77
Travel	0.25±0.2/-0.1mm 06-8S,-6N-6R-77 0.45±0.2mm (06-9/7 N,R)(06-4/5 R,T) 0.6±0.2mm (06-9/7 T)
Operating Life	100,000 cycles min. for 06-8/6/77 100,000 cycles min. for 06-9/7/5/4
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-40°C ~ +80°C

HOW TO ORDER

DISD-□WTC06-□□-□


M=Surface Mounting Terminals
GM=S.M.T & With Ground Terminal
(66 Only)

Dimension H:
4=4.5mm (N, R)
5=3.5mm (N, R, T)
6=3.1mm (N, R)
7=5.2mm (N, R, T)
77=7.3mm (N, T)
8=2.3mm (S)
9=3.8mm (N, R, T)

Operating Force:
N=Brown:
160gf at 6N
180gf at 9N, 7N, 5N, 4N, 77N
S=Silver:
160gf at 8S
R=Red:
260gf at 9R, 7R, 6R, 5R, 4R
T=Transparent:
360gf at 9T, 7T, 5T, 77T

Package:
B=Tube
T/R=Tape & Reel

CIRCUIT

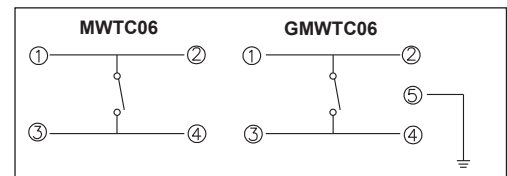

PACKAGE





<Tube>

75 pcs

<Tape & Reel>

GMWTC06-6: 2000pcs
MWTC06-6, -8: 2000pcs
MWTC06-9, -5: 1900pcs
MWTC06-7, -4: 900pcs
MWTC06-77: 650pcs

DISD-GMWTC06-6

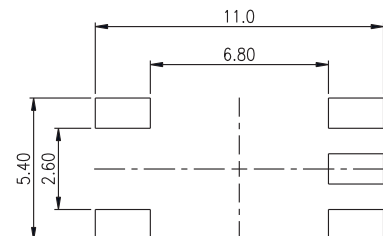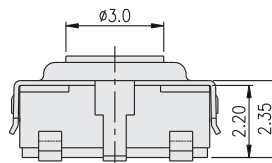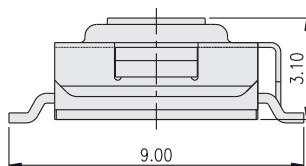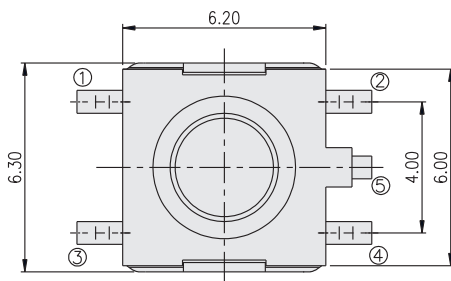





P.C.B. LAYOUT

TACT SWITCH DISD-(G)MWTC06

6x6 Gull-Wing SMT
Washable Type IP67




DISD-MWTC06-8

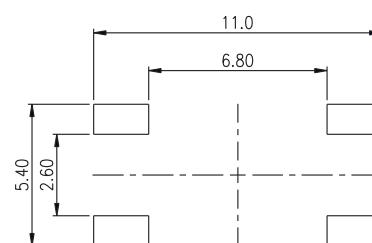

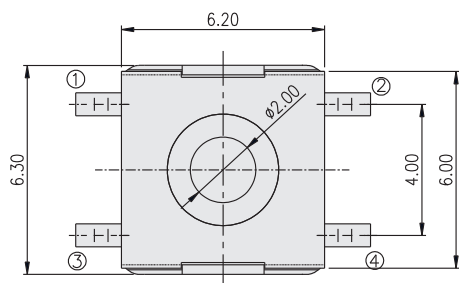


P.C.B. LAYOUT

DISD-MWTC06- ☐

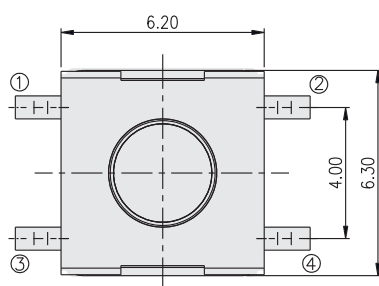

NAME	H
-4	4.50
-5	3.50
-7	5.20
-9	3.80

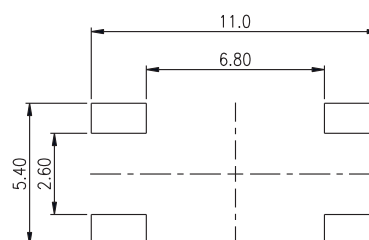

P.C.B. LAYOUT