


# TACT SWITCH DISD-PTITC0

2.8x3.8  
Side Push / Vertical Push Type

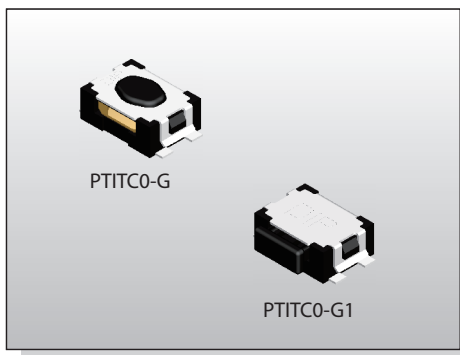

## FEATURES

- ✘ Compact-sized 2.8x3.8mm
- ✘ Vertical or side actuation
- ✘ Wide stem


## APPLICATION

- ✘ Automotive
- ✘ Portable Electronic Device
- ✘ Control panel


## SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	100±50gf, 160±50gf (Vertical Push) 200±65gf (Side Push) 400±80gf (Vertical Push)
Travel	0.13±0.1mm (Vertical Push) 0.20±0.1mm (Side Push)
Operating Life	50,000 cycles for 400gf 100,000 cycles for 100/160/200gf
Operating Temp.	-20°C ~ +80°C
Storage Temp.	-30°C ~ +85°C

## HOW TO ORDER

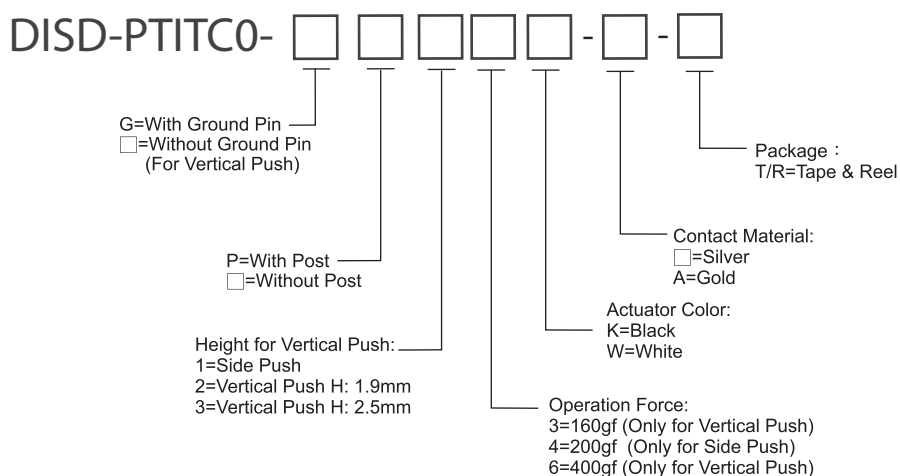


## CIRCUIT

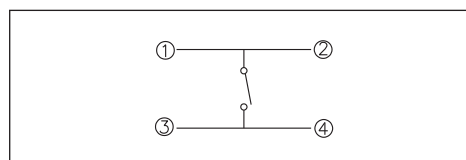

## PACKAGE

<Tape & Reel>  
IPTG14K: 3500 pcs  
IPTG23K: 7000 pcs  
IPTG33K: 6300 pcs

## DISD-PTITC0-G

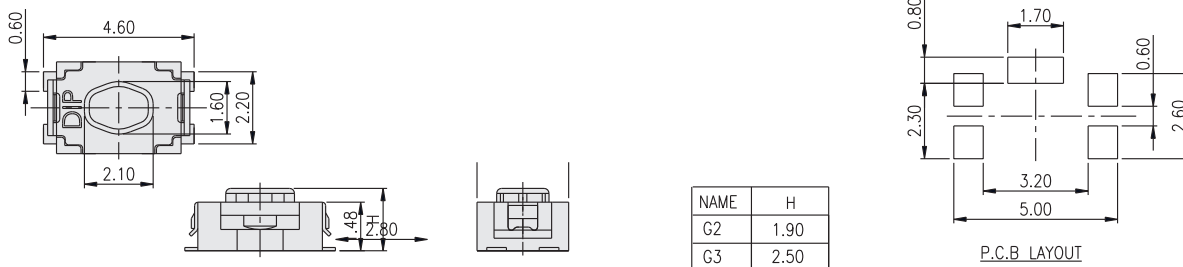

## DISD-PTITC0-G1

