

FEATURES

- ✧ Compact-sized 2.9x3.9mm
- ✧ Vertical or side actuation
- ✧ Reflow solderable


APPLICATION

- ✧ Automotive
- ✧ Portable Electronic Device
- ✧ Control panel


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	160±50gf (Vertical Push) 220±65gf (Side Push)
Travel	0.13±0.1mm (Vertical Push) 0.20±0.1mm (Side Push)
Operating Life	100,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

HOW TO ORDER

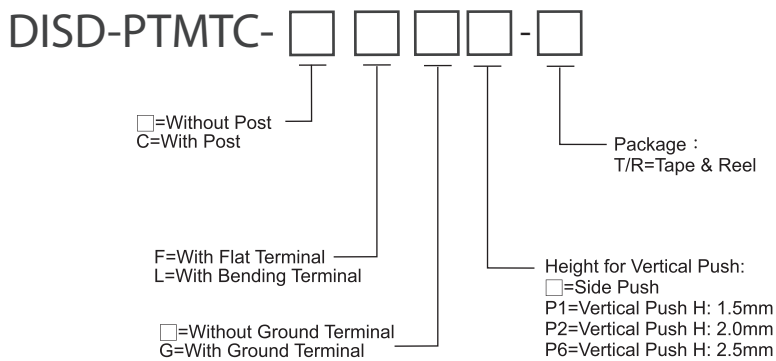

CIRCUIT

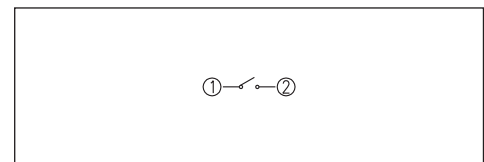


PACKAGE

<Tape & Reel>

Side push type: 3500 pcs
Vertical push type: 2000 pcs

DISD-PTMTC-FP

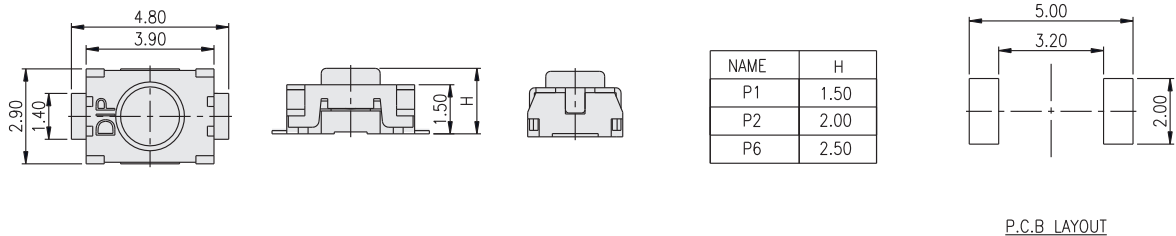

DISD-PTMTC-CLG

