

**FEATURES**

- ✘ Right angle (SMT type )
- ✘ Support terminal available
- ✘ Reflow solderable


**APPLICATION**

- ✘ Audio, OA equipment
- ✘ Instrumentation
- ✘ Hair dryers


**SPECIFICATION**

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	10MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf, Brown(N) 260±70gf, Red(R)
Travel	0.45±0.2mm
Operating Life	500, 000 cycles
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

**HOW TO ORDER**

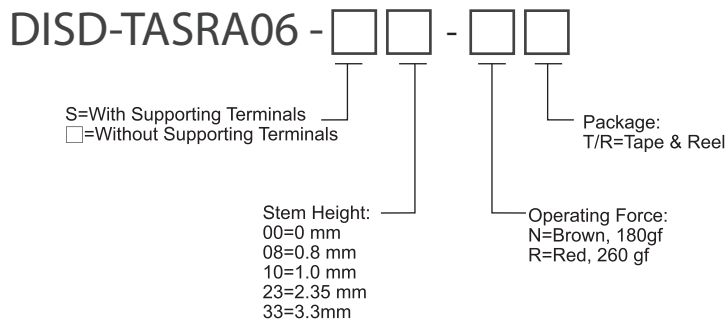


**CIRCUIT**

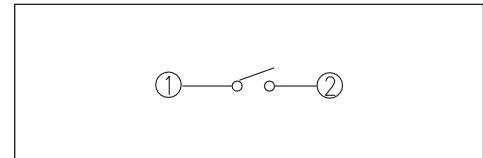


**PACKAGE**

<Bag>  
500 pcs  
<Tape & Reel>  
TASRA06-(S)(00/08/10/23)-T/R: 700pcs  
TASRA06-(S)33-T/R: 500pcs

TASRA06

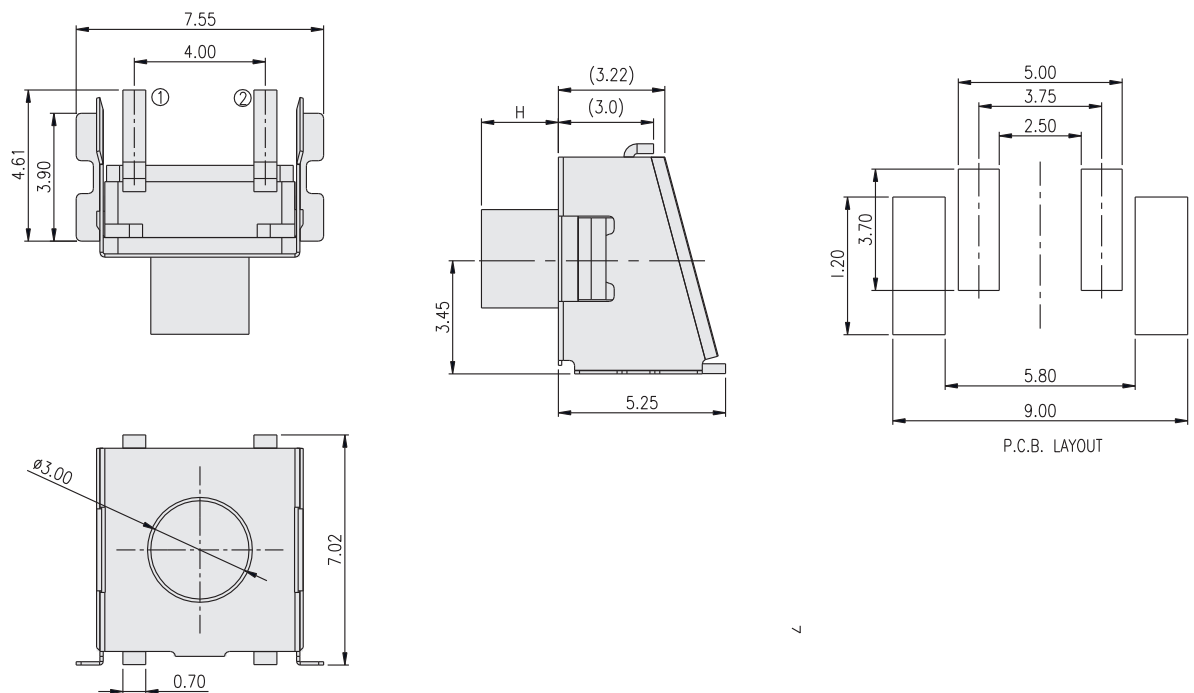

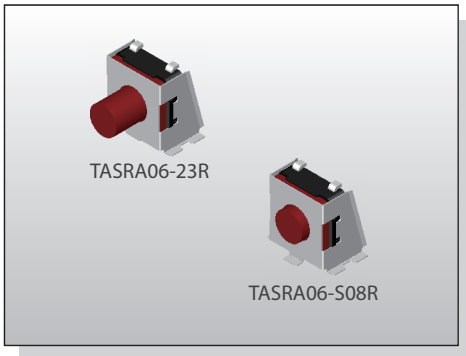

**FEATURES**

- ✘ Right angle (SMT type )
- ✘ Support terminal available
- ✘ Reflow solderable


**APPLICATION**

- ✘ Audio, OA equipment
- ✘ Instrumentation
- ✘ Hair dryers


**SPECIFICATION**

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	10MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±50gf, Brown(N) 260±70gf, Red(R)
Travel	0.45±0.2mm
Operating Life	500, 000 cycles
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

**HOW TO ORDER**

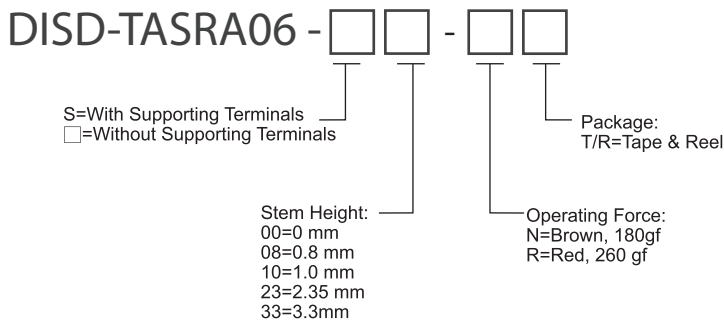

**CIRCUIT**

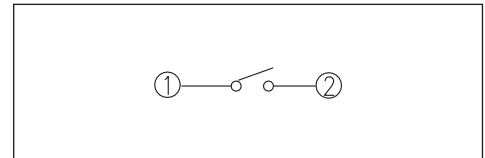

**PACKAGE**

<Bag>  
500 pcs  
<Tape & Reel>  
TASRA06-(S)(00/08/10/23)-T/R: 700pcs  
TASRA06-(S)33-T/R: 500pcs

TASRA06-S

