


TACT SWITCH DISD-TG325

3.5x6 Thinner Type Tactile Switch

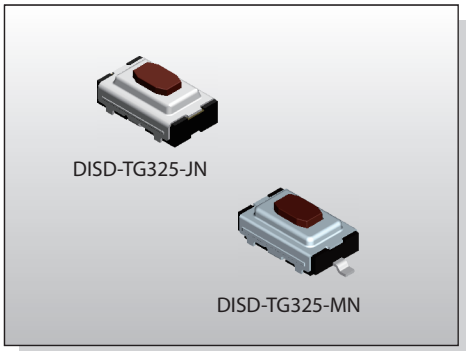

FEATURES

- ✘ Thinner type 2.5mm height
- ✘ High density mounting
- ✘ With anti-ESD of ground terminal


APPLICATION

- ✘ Consumer products
- ✘ Instrumentation
- ✘ Industrial


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	160±50gf, Brown(N) 260±50gf, Red(R)
Travel	0.25+0.2/-0.1mm
Operating Life	30,000 cycles for 260gf 50,000 cycles for 160gf
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

HOW TO ORDER

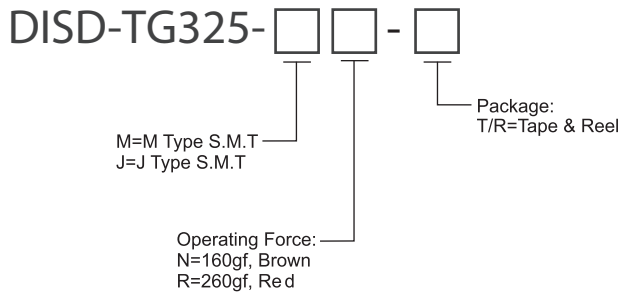


CIRCUIT

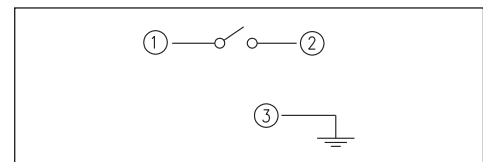

PACKAGE

<Tape & Reel>
2800 pcs

DISD-TG325-M

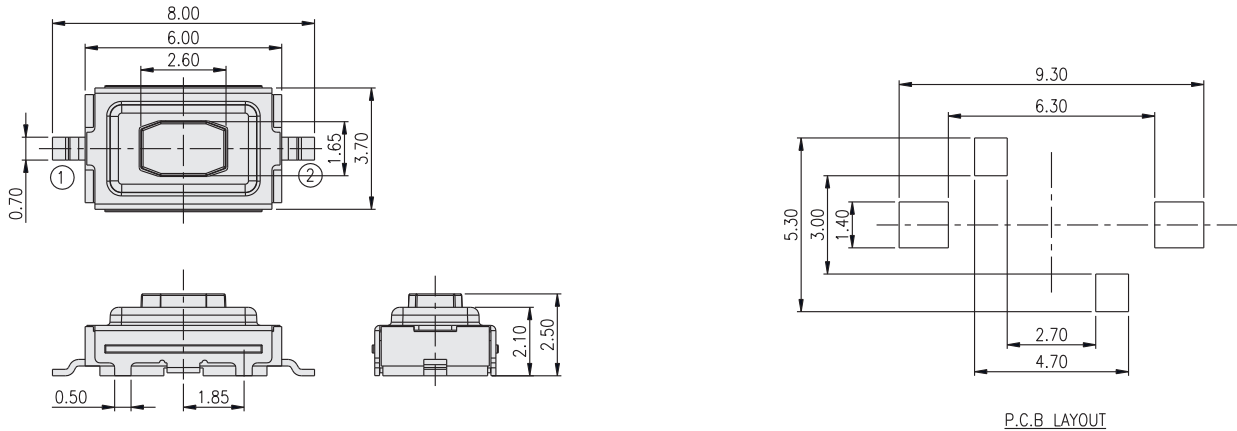

DISD-TG325-J

