


Microphone

SGBD-N4530CD543




Electrical Specifications

Model	N4530CD543	
Directivity	Noise Cancelling	
Operating Voltage Range	(V)	1 ~ 10
Power Supply (Vs)	(V)	2
Resistance Loading (RL)	(Ω)	2.2 K
Sensitivity (0 dB = 1V / Pa) at 1K Hz	(dB)	-54 ± 3 (at L = 50 cm)
Max. Current	(mA)	0.5
Frequency Range	(Hz)	100 ~ 10000
Voltage Deduction Characteristic	Within 3 dB at 1.5 V	
S / N Ratio	(dB)	More than 55

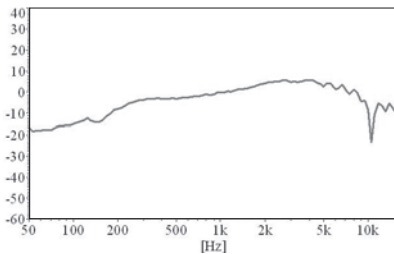


Dimensions


Top View



Side View



Bottom View



all dimensions are in mm