





SVHJ-A1253 SERIES
1.25mm pitch
Housing
Ultra Low Profile

SVHJ – A1253H - xxP

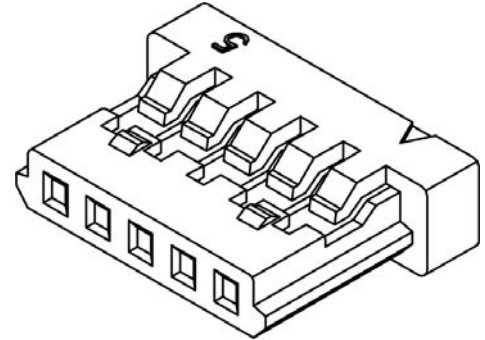

Specification

Current Rating	1A AC / DC
Voltage Rating	150V AC / DC
Temperature Range	-25°C ~ +85°C
Contact Resistance	30mΩ Max.
Insulation Resistance	500MΩ Min.
Withstanding Voltage	500V AC/minute
Material	Nylon 66, UL94V-0
Pantone Color	7529C

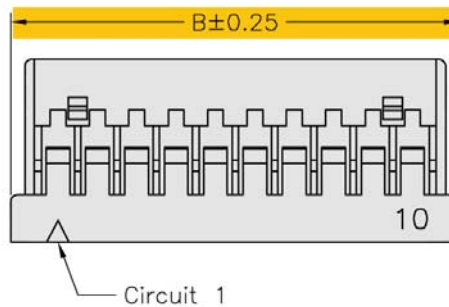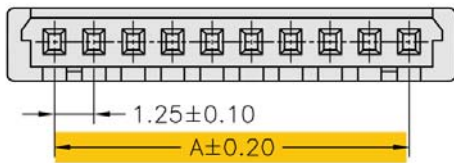

Ordering Information & Dimensions

SVHJ - A1253H - xxP	Dimensions	
	A	B
SVHJ - A1253H - 2P	1.25	4.25
SVHJ - A1253H - 3P	2.50	5.50
SVHJ - A1253H - 4P	3.75	6.75
SVHJ - A1253H - 5P	5.00	8.00
SVHJ - A1253H - 6P	6.25	9.25
SVHJ - A1253H - 7P	7.50	10.50
SVHJ - A1253H - 8P	8.75	11.75
SVHJ - A1253H - 9P	10.00	13.00
SVHJ - A1253H - 10P	11.25	14.25
SVHJ - A1253H - 11P	12.50	15.50
SVHJ - A1253H - 12P	13.75	16.75
SVHJ - A1253H - 13P	15.00	18.00
SVHJ - A1253H - 14P	16.25	19.25
SVHJ - A1253H - 15P	17.50	20.50
SVHJ - A1253H - 20P	23.75	26.75
SVHJ - A1253H - 21P	25.00	28.00
SVHJ - A1253H - 25P	30.00	33.00
SVHJ - A1253H - 30P	36.25	39.25

P = Pin