


Screw Pin

SVPC-SC-P5127FH07

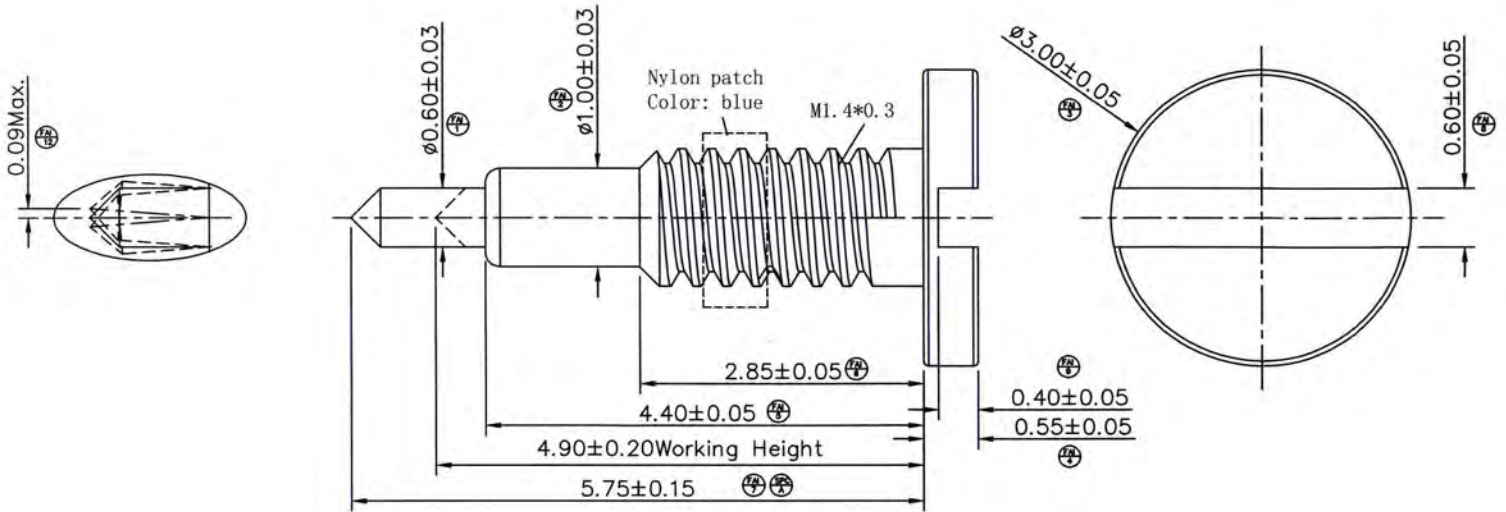

Dimension: mm

NOTE:

1. Material

Plunger: Brass
 Barrel: QSn
 Spring: SUS
 Nylon Patch: Loctite 243

2. Plating

Plunger & Barrel: 5 microinch min. Au over 50 ~ 100 microinch nickel

3. Electrical

Rated current & voltage: DC 12V; 1A Max.
 Contact resistance: 200 mOhm max. at working height (quiescence)

4. Mechanical

Spring force: 120g min. at 4.90mm working height.
 Durability: min. 10.000 circles

5. To ensure the best usage, please operate it based on the working height.
6. Harmful material control please follow DOC. NO."DQ03050".
7. RoHS, REACH and Halogen Free compliant product.