


NSS601 Series


■ Features

- Auto return type.
- Long life.



Rating	DC4V 0.3A
Stroke	1.5 ± 0.3 mm
Contact Resistance	70mΩ max.
Insulation Resistance	DC100V - 100MΩ min.
Withstand Voltage	AC100V - 1 minute

Recommended Reflow Soldering Profile

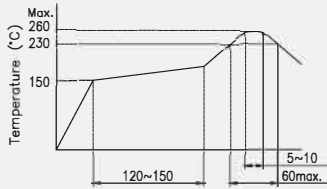

Recommended Manual Soldering Profile

	Temperature	Time
Manual Soldering Temperature	350 °C (max.)	3 Sec. (max.)

The solder iron and solder shall be applied at a distance of 1.91 mm to 2.54 mm from the plastic housing.

Durability	20,000 cycles
------------	---------------


■ SMT - G Type Horizontal 1 Pole 3 Positions

Product No.	Package
NSS601-213N-AAAG1T	2,300 Pcs/Reel


■ Specifications

Timing	Non-Shorting
Operating Force	B→A : 100±50 gf B→C : 100±50 gf



Schematic



P.C.B Layout

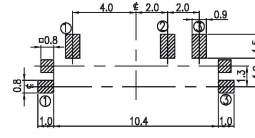

■ Outline Drawing

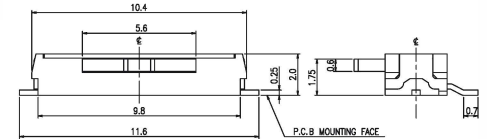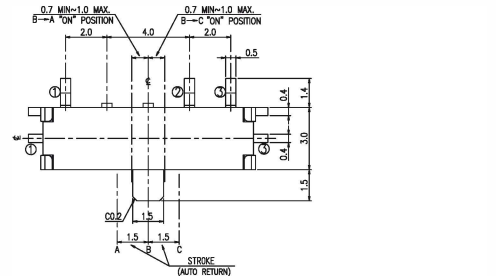

General Tolerance : ±0.2mm.


■ SMT - C Type Horizontal 1 Pole 3 Positions

Product No.	Package
NSS601-213N-AAAC1T	2,300 Pcs/Reel


■ Specifications

Timing	Non-Shorting
Operating Force	B→A : 100±50 gf B→C : 100±50 gf



Schematic



P.C.B Layout

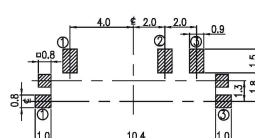

■ Outline Drawing

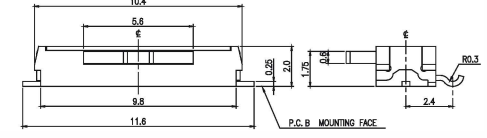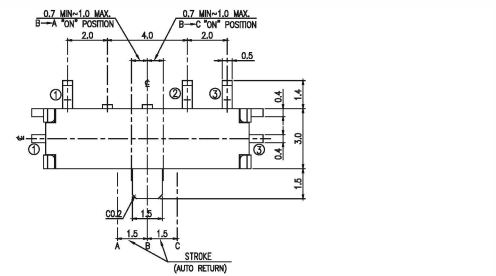

General Tolerance : ±0.2mm.