


Rolling Pin

SVPC-RF-P5079FP06

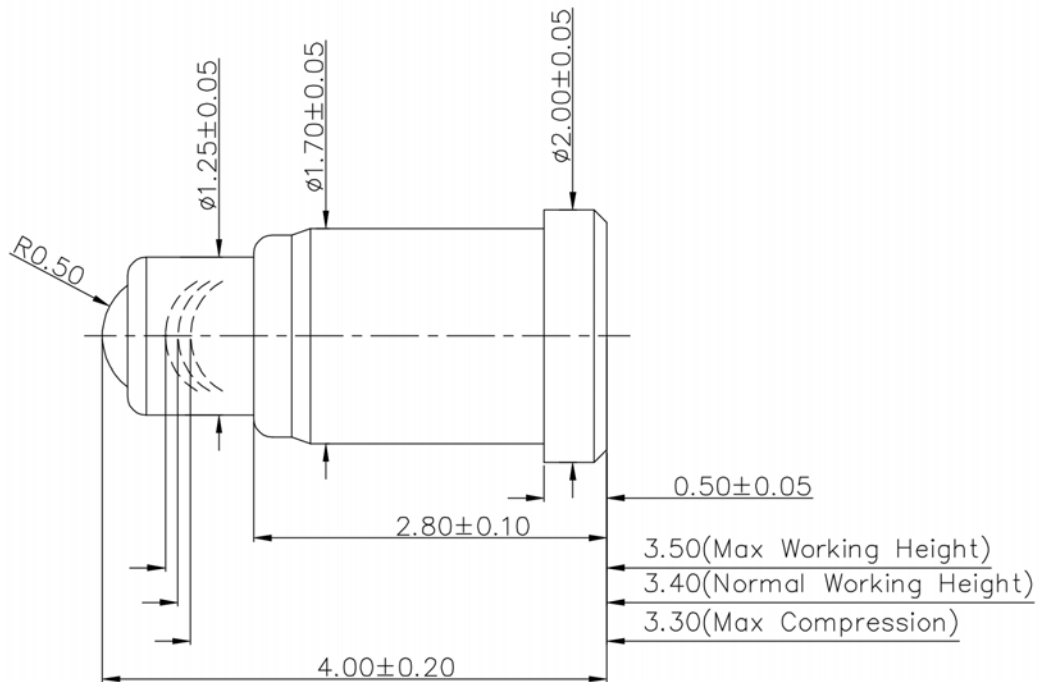

Dimension: mm

NOTE:

1.Material

Plunger: Brass
Barrel: Brass
Spring: SUS
Ball: Brass

2.Plating

Plunger & Barrel: 10 microinch min. Au over 50 ~ 120 microinch min. Ni
Ball: 15 microinch min. Pd over 15 microinch Min. PdNi over 40 ~ 80 microinch min. Ni

3.Electrical

Rated current & voltage: DC 12V; 2A Max.
Contact resistance: 100 mohm Maximum at working height (quiescence)

4.Mechanical

Spring force: 60g±15g at working height.
Durability: min. 2,000 circles

5. To ensure the best usage, please operate it based on the working height.
6. When the current is greater than 1 A then need to increase the time delay circuit (3 second)