


# Rolling Pin

## SVPC-RF-P6783FH02

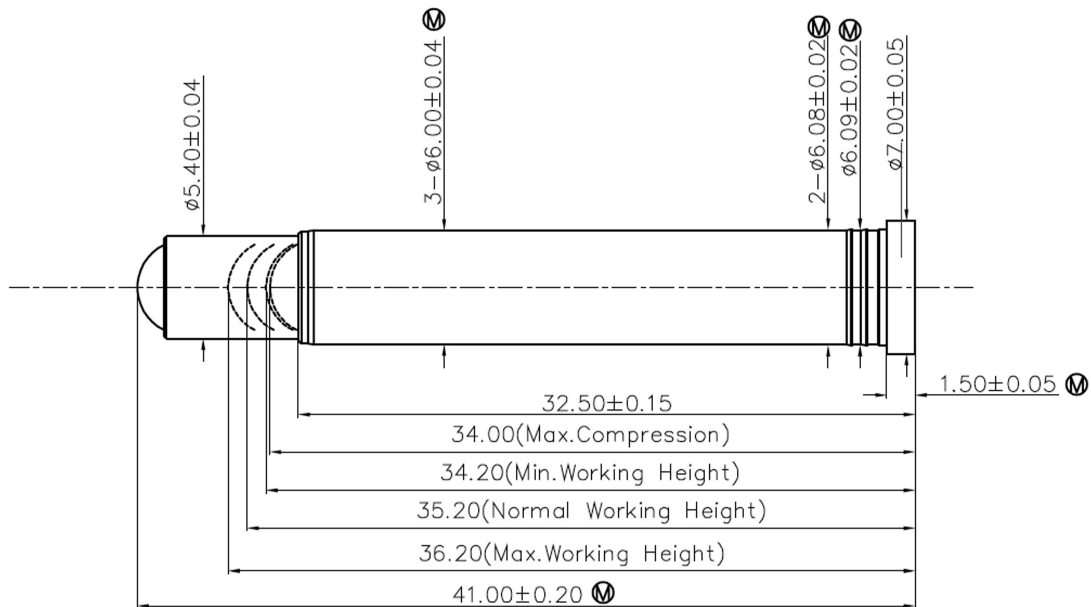

Dimension: mm

**NOTE:**

**1. Material**

Plunger: Brass  
 Barrel: Brass  
 Spring: SUS  
 Ball: Brass

**2. Plating**

Plunger & Barrel: 30 microinch min. Au over 50 ~ 120 microinch min. Nickel  
 Ball: 5 microinch min. Pd over 30 microinch Min. PdNi over 40 ~ 80 microinch min. Ni

**3. Electrical**

Rated current & voltage: DC 12V; 6A  
 Contact resistance: 50 mohm Maximum at working height (quiescence)

**4. Mechanical**

Spring force: 150g ± 40g at working height.  
 Durability: min. 10,000 circles

5. To ensure the best usage, please operate it based on the working height.  
 Based on the engineering drawings, shall not exceed the maximum allowed compression

6. RoHS & HF complied product