N&H Technology GmbH
Gießerallee 21 D - 47877 Willich
Tel. +49 (0)2154 - 8125 0 Fax +49 (0)2154 - 8125 22
www.nh-technology.de info@nh-technology.de

Rolling Pin
SVPC-RP-P07319PP1

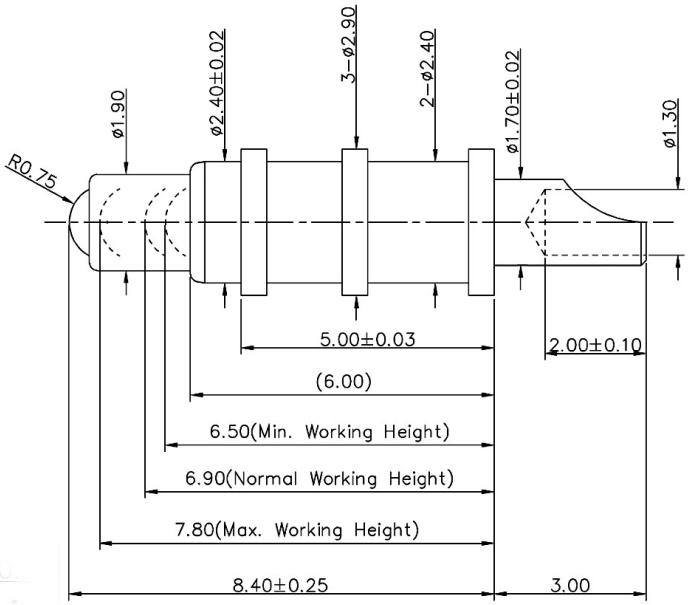

Dimension: mm

NOTE:

1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Ball: Brass

2.Plating
Plunger & Barrel: 10 miro-inch min. Au over 50 ~ 100 micro-inch min. Nickel
Ball: 5 micro-inch min. Pd over 30 micro-inch min. PdNi over 40 ~ 80 micro-inch min. Ni

3.Electrical
Rated current & voltage: DC 30V; 3A
Contact resistance: 100 mohm Maximum at working height (quiescence)

4.Mechanical
Spring force: 90g ± 20g at working height.
Durability: min. 10,000 circles

5. To ensure the best usage, please operate it based on the working height.
Based on the engineering drawing, shall not exceed the maximum allowed compression.

6. RoHS & HF complied product

All product data is based exclusively on information supplied by our manufacturer. No technical properties are warranted without specific agreement from N&H Technology in writing. Technical properties are subject to change without notice