


Rolling Pin

SVPC-RP-P5079PP08

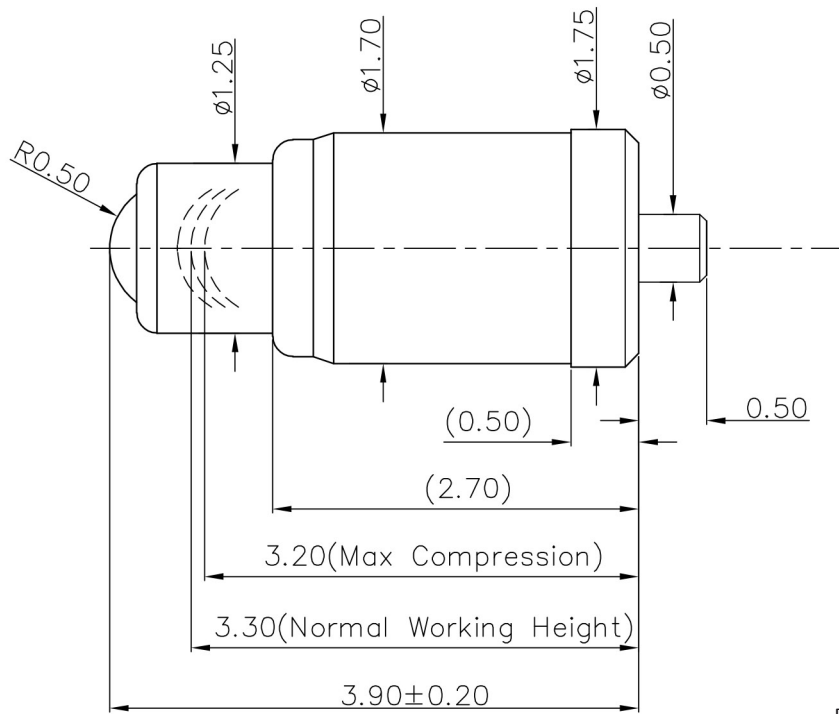

Dimension: mm

NOTE:

1. Material

Plunger: Brass

Barrel: Brass

Spring: SUS

Ball: Brass

2. Plating

Plunger & Barrel: 10 microinch min. Au over 50 ~ 100 microinch min. Nickel

Ball: 15 microinch min. Pd over 15 microinch Min. PdNi over 40 ~ 80 microinch min. Ni

3. Electrical

Rated current & voltage: DC 12V; 1A

Contact resistance: 300 mohm Maximum at working height (quiescence)

4. Mechanical

Spring force: 60g ± 15g at working height.

Durability: min. 10,000 circles

5. To ensure the best usage, please operate it based on the working height.

Based on the engineering drawing, shall not exceed the maximum allowed compression.

When the current is greater than 1A then need to increase the time delay circuit (3 sec.)

6. RoHS & HF complied product