


Rolling Pin

SVPC-RP-P6217PP01

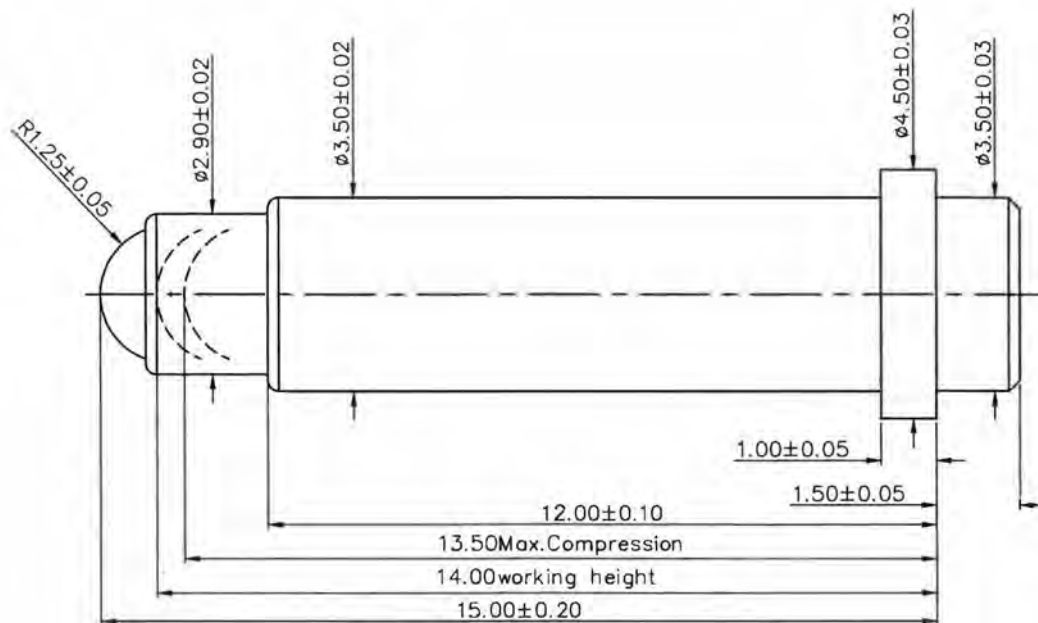

Dimension: mm

NOTE:

1. Material

Plunger: Brass

Barrel: Brass

Spring: SUS

Ball: Brass

2. Plating

Plunger&Barrel: 15 microinch Min. Au over 50 microinch Min. Ni

Ball: 5 microinch Min. Pd over 30 microinch Min. PdNi over 40 microinch Min. Ni

3. Electrical

Rated current & voltage: DC 12V; 1 A Max.

Contact resistance: 100 mohm Maximum at working height (quiescence)

4. Mechanical

Spring force: 60g±15g at working height.

Durability: min. 200,000 circles (Circular trajectory of diameter 40mm)

5. To ensure the best usage please operate it based on the working height.

6. When the current is greater than 1 A then need to increase the time delay circuit (3 second)

7. RoHS & HF complied product