Magnetic Transducer

SGBD-UDT0723CLF-MP

Electrical Specifications


MODEL NO.	SGBD-UDT0723CLF - MP	
OPERATING VOLTAGE RANGE		2.0 ~ 5.0
RATED VOLTAGE		3.6
MAX. RATED CURRENT	(mA)	100.00
COIL RESISTANCE		12.0 ± 2.0
MIN. SOUND OUTPUT AT 10 cm	(dBA)	85.0
RESONANT FREQUENCY		3100
OPERATING TEMPERATURE		- 30 ~ + 70
TERMINAL		SMD
HOUSING MATERIAL		LCP
WEIGHT		0.33

Dimensions

TOP VIEW

SIDE VIEW

BOTTOM VIEW

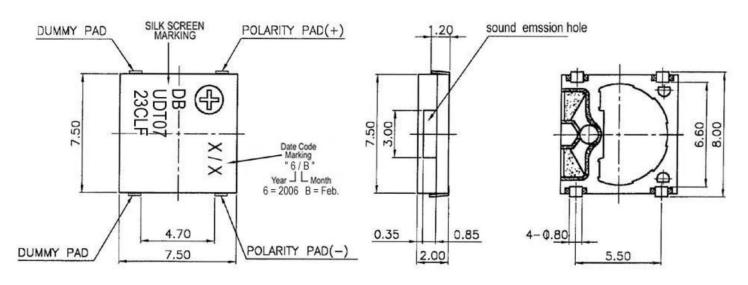

Gießerallee 21 Tel. +49 (0)2154 - 8125 0 www.nh-technology.de D - 47877 Willich Fax +49 (0)2154 - 8125 22 info@nh-technology.de

All product data is based exclusively on information supplied by our manufacturer. No technical properties are warranted without specific agreement from N&H Technology in writing. Technical properties are subject to change without notice