

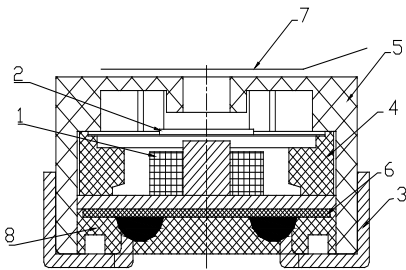
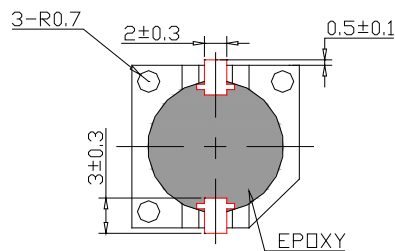



SGNU-UCT		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	12.8 x 12.8 x 7.1
Rated Voltage (Square Wave)	V	5
Operating Voltage	V	3-8
*Rated Current (Max)	mA	40
*Min Sound Output at 10cm	dB	85
*Resonant Frequency	Hz	2.400
Coil Resistance	$\Omega$	45 $\pm$ 5
Operating Temperature	$^{\circ}$ C	-40~+85
Storage Temperature	$^{\circ}$ C	-40~+85
Weight	g	2
Housing Material		PPS
Lead Pin Material		Brass
QTY per Tape / Reel (Blister Gurte)	pcs	

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )



侧激光刻字: ⊕



Unless otherwise specified: Tolerance : $\pm$  0.5 (Unit: mm)