


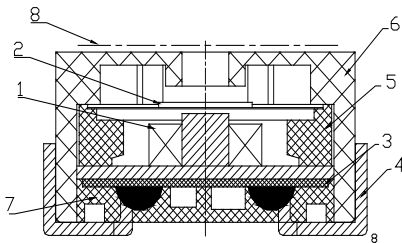
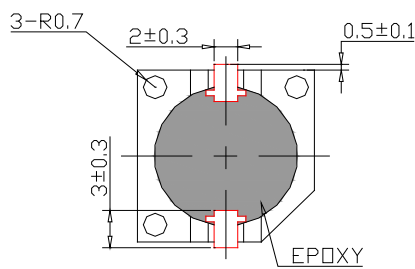



SGNU-UCTXIC		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	12.8*12.8*7.1
Rated Voltage (Square Wave)	VDC	3
Operating Voltage	VDC	2-5
*Rated Current (Max)	mA	30
*Min Sound Output at 10cm	dB	85
*Resonant Frequency	Hz	2400±100
Operating Temperature	°C	-40~+85
Storage Temperature	°C	-40~+85
Weight	g	2
Housing Material		PPS
Lead Pin Material		Red Copper (DSn)
QTY per Tape / Reel (Blister Gurte)	pcs	

* Value Applying at Rated Voltage (VDC)



侧激光刻字: ⊕



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)