
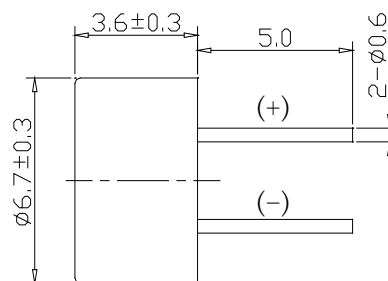





<b>SGNU-UGCM06A</b>		
<b>ITEM</b>	<b>UNIT</b>	<b>SPECIFICATION</b>
Dimensions	mm	φ6.7*3.6
Rated Voltage (Square Wave)	V	3.0
Operating Voltage	V	2.0-4.0
*Mean Current Consumption (Max)	mA	110
*Min Sound Output at 10cm	dB	70
*Resonant Frequency	Hz	3.000
Coil Resistance	Ω	8±1
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+85
Weight	g	1
Housing Material		NORYL
Lead Pin Material		Red Copper (DSn)
QTY per Tape / Reel (Blister Gurte)	pcs	

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)