
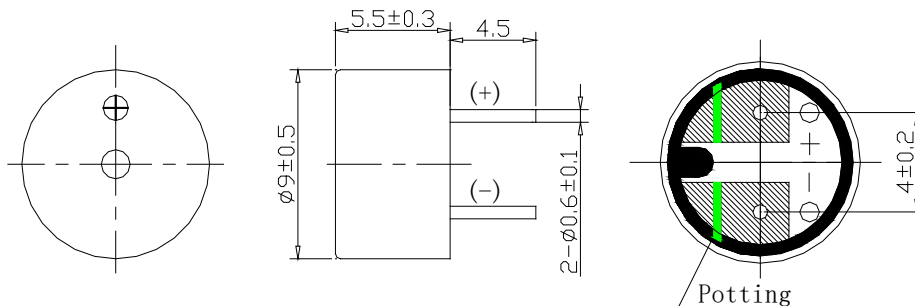



<b>SGNU-UGCM09E</b>		
<b>ITEM</b>	<b>UNIT</b>	<b>SPECIFICATION</b>
Dimensions	mm	φ9*5.5
Rated Voltage (Square Wave)	V	3
Operating Voltage	V	2-5
*Rated Current (Max)	mA	80
*Min Sound Output at 10cm	dB	85
*Resonant Frequency	Hz	2.730
Coil Resistance	Ω	16±4
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+85
Weight	g	1.0
Housing Material		PBT
Lead Pin Material		Red Copper (DSn)
QTY per Tape / Reel (Blister Gurte)		

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)