
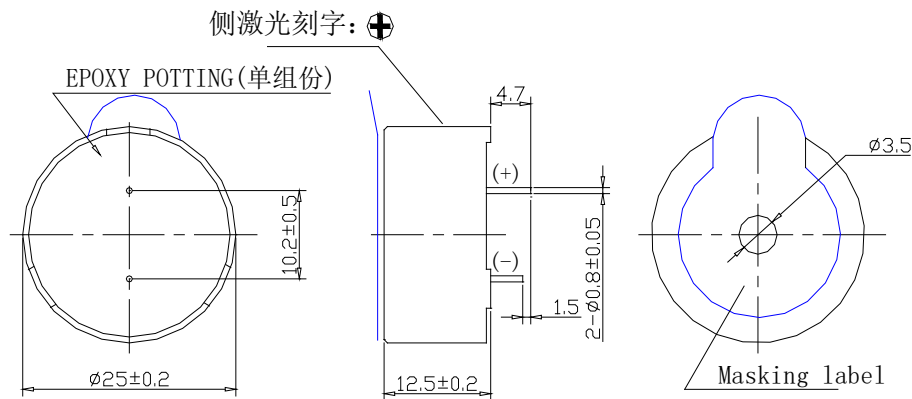



SGNU-UGCM25		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	φ25*12.5
Rated Voltage (Square Wave)	V	12
Operating Voltage	V	8-14
*Rated Current (Max)	mA	55
*Min Sound Output at 10cm	dB	85
*Resonant Frequency	Hz	1.000
Coil Resistance	Ω	120±15
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+85
Weight	g	10
Housing Material		NORYL
Lead Pin Material		Red Copper (DSn)
QTY per Tape / Reel (Blister Gurte)	pcs	

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)

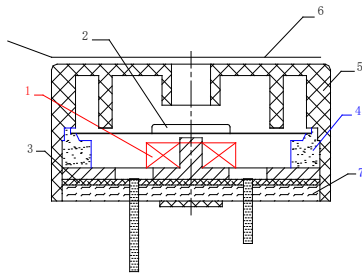

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)