
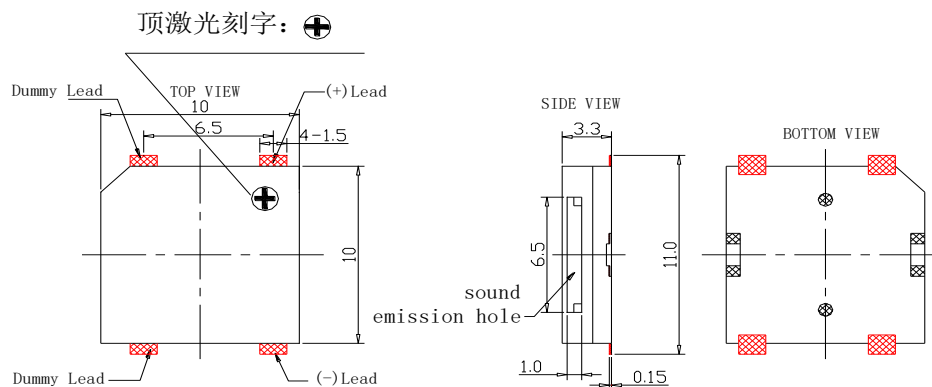



| SGNU-UGCT1035A | | |
|-------------------------------------|--------------|---------------|
| ITEM | UNIT | SPECIFICATION |
| Dimensions | mm | 10 x 10 x 3.3 |
| Rated Voltage (Square Wave) | V | 3 |
| Operating Voltage | V | 2-5 |
| *Rated Current (Max) | mA | 70 |
| *Min Sound Output at 10cm | dB | 85 |
| *Resonant Frequency | Hz | 2.700 |
| Coil Resistance | Ω | 17.5 \pm 3 |
| Operating Temperature | $^{\circ}$ C | -40~+85 |
| Storage Temperature | $^{\circ}$ C | -40~+85 |
| Weight | g | 0.6 |
| Housing Material | | LCP (Black) |
| Lead Pin Material | | Brass |
| QTY per Tape / Reel (Blister Gurte) | pcs | 1.000 |

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)

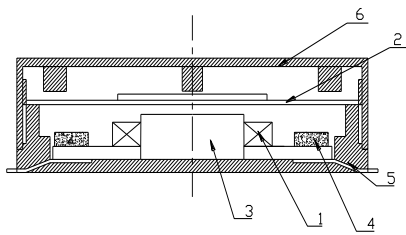

Unless otherwise specified: Tolerance : \pm 0.5 (Unit: mm)