






<b>SGNU-UGCT5002A</b>		
<b>ITEM</b>	<b>UNIT</b>	<b>SPECIFICATION</b>
Dimensions	mm	5 x 5 x 2
Rated Voltage (Square Wave)	V	3.0
Operating Voltage	V	2-5
*Rated Current (Max)	mA	100
*Min Sound Output at 10cm	dB	75
*Resonant Frequency	Hz	4.000
Coil Resistance	$\Omega$	12 $\pm$ 2
Operating Temperature	$^{\circ}$ C	-40~+85
Storage Temperature	$^{\circ}$ C	-40~+85
Weight	g	0.3
Housing Material		LCP (Black)
Lead Pin Material		Brass
QTY per Tape / Reel (Blister Gurte)	pcs	2.000

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )

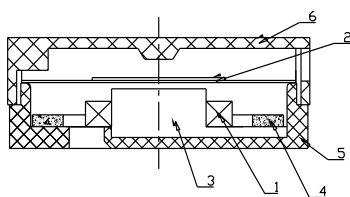

SMD REFLOW PATTERN

Unless otherwise specified: Tolerance : $\pm$  0.5 (Unit: mm)