
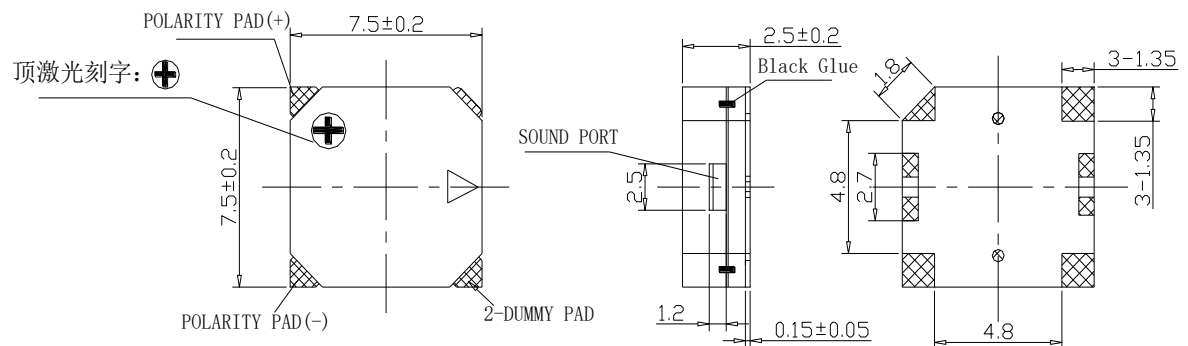


SGNU-UGCT7525A		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	7.5 x .7.5 x 2.5
Rated Voltage (Square Wave)	V	3.6
Operating Voltage	V	2.5-4.5
*Rated Current (Max)	mA	100
*Min Sound Output at 10cm	dB	82
*Resonant Frequency	Hz	2.700
Coil Resistance	Ω	15 \pm 3
Operating Temperature	$^{\circ}$ C	-40~+85
Storage Temperature	$^{\circ}$ C	-40~+85
Weight	g	0.6
Housing Material		LCP(Black)
Lead Pin Material		Brass
QTY per Tape / Reel (Blister Gurte)	pcs	2.000

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)

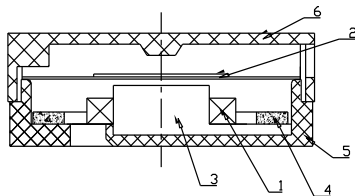

Unless otherwise specified: Tolerance : \pm 0.5 (Unit: mm)