
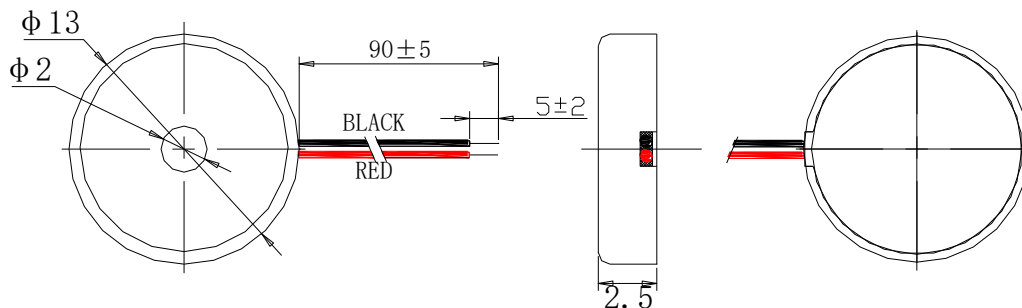


SGNU-UGPA13E		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	Φ13*2.5
Rated Voltage (Square Wave)	Vp-p	10
Operating Voltage	Vp-p	1-30
*Rated Current (Max)	mA	5
*Min Sound Output at 4.8kHz/10cm	dB	80
*Resonant Frequency	Hz	4800
Capacitance at 120Hz	pF	15000±30%
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	1
Housing Material		Black ABS
Tone Nature		Single
Lead Wire		UL1571 AWG32
QTY per Tape / Reel (Blister Gurte)	pcs	

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)