
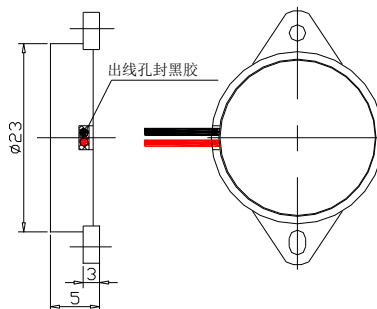
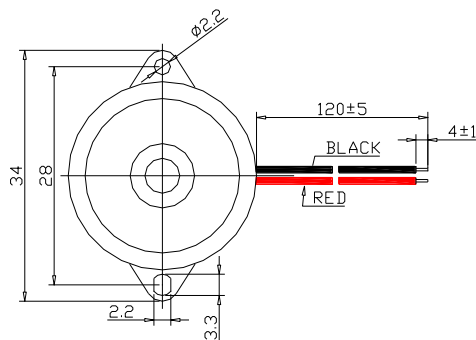


SGNU-UGPA23A		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	Φ23*5
Rated Voltage (Square Wave)	Vp-p	12
Operating Voltage	Vp-p	3-30
*Rated Current (Max)	mA	5
*Min Sound Output at 2.0kHz/30cm	dB	80
*Resonant Frequency	Hz	4000
Capacitance at 120Hz	pF	24000±30%
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	2
Housing Material		Black ABS
Tone Nature		UL1095 AWG28
Lead Wire		Lead wire
QTY per Tape / Reel (Blister Gurte)	pcs	

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )

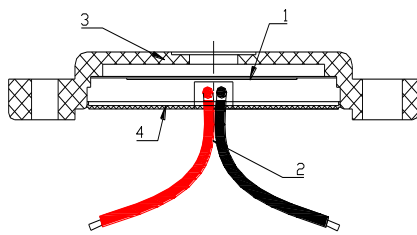

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)