
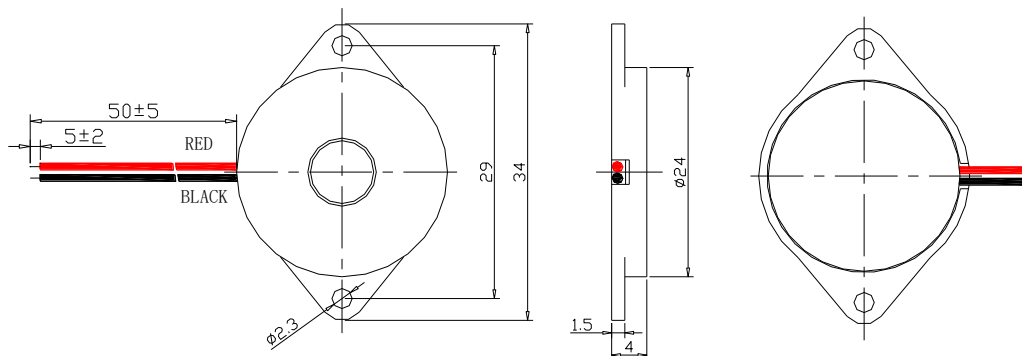


SGNU-UGPA24C		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	Φ24*4
Rated Voltage (Square Wave)	Vp-p	15
Operating Voltage	Vp-p	1-30
*Rated Current (Max)	mA	8
*Min Sound Output at 5.5kHz/10cm	dB	90
*Resonant Frequency	Hz	5500
Capacitance at 120Hz	pF	18000 ± 30%
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+85
Weight	g	1.9
Housing Material		Black MPPO
Tone Nature		Single
Lead Wire		UL1571 AWG32
QTY per Tape / Reel (Blister Gurte)	pcs	

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)

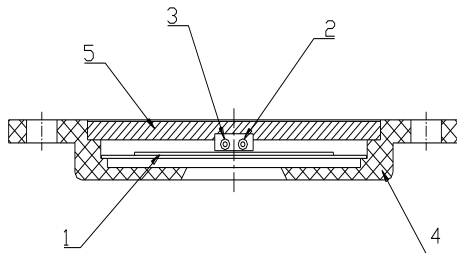

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)