

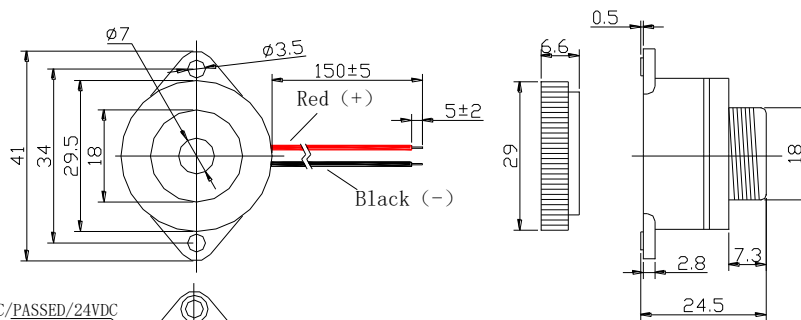


SGNU-UGPA30BXWS		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	Φ29.5*24.5
Rated Voltage (Square Wave)	VDC	24
Operating Voltage	VDC	3-28
*Rated Current (Max)	mA	30
*Min Sound Output at 30cm	dB	95
*Resonant Frequency	Hz	3500±500
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	15
Housing Material		ABS
Tone Nature		Slow Pulse
Lead Wire		UL1095 AWG28 (Red & Black)
QTY per Tape / Reel (Blister Gurte)	pcs	

* Value Applying at Rated Voltage(DC)



底贴: QC/PASSED/24VDC



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)