
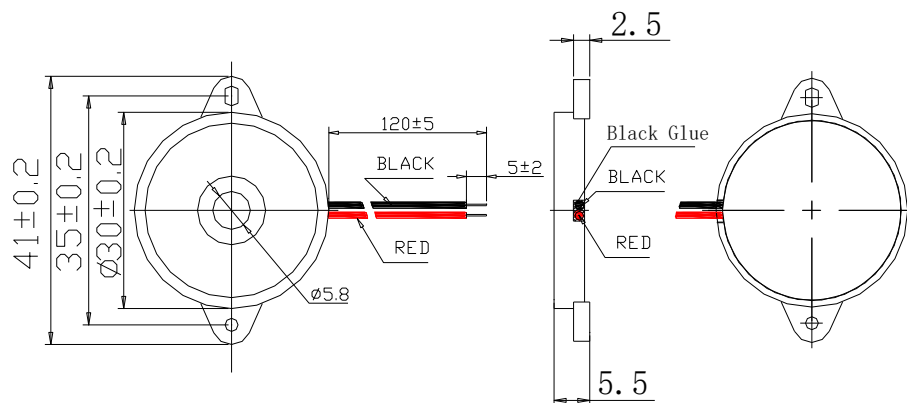


SGNU-UGPA30F		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	Φ30*5.5
Rated Voltage (Square Wave)	Vp-p	9
Operating Voltage	Vp-p	1-30
*Rated Current (Max)	mA	3
*Min Sound Output at 10cm	dB	88
*Resonant Frequency	Hz	3500
Capacitance at 120Hz	pF	20000±30%
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	3.5
Housing Material		ABS(BLACK)
Tone Nature		Single
Lead Wire		UL1095 AWG28 (Red & Black)
QTY per Tape / Reel (Blister Gurte)	pcs	

* Value Applying at Rated Voltage(Vp-p) (resonant frequency , 1/2 duty , square wave)

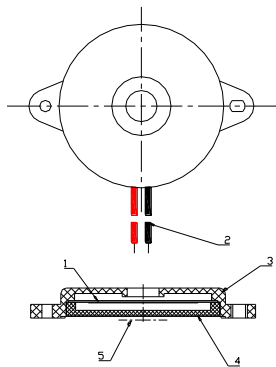

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)