
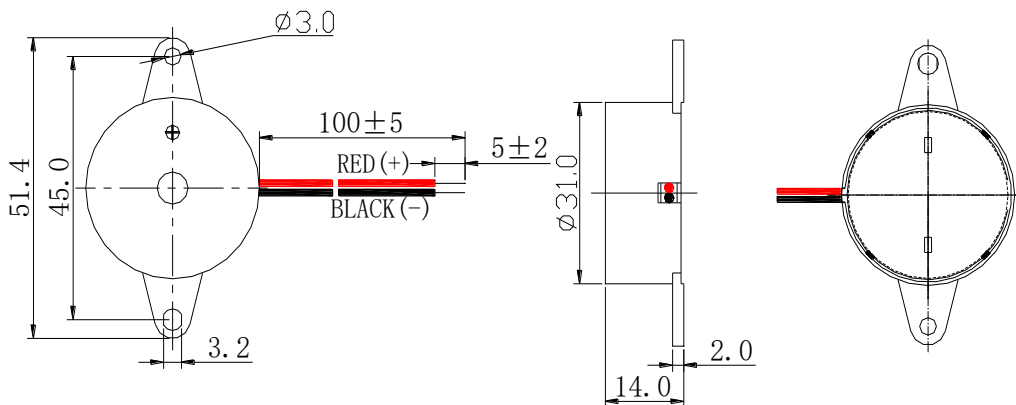


SGNU-UGPA31AX		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	φ31*14
Rated Voltage (Square Wave)	VDC	9
Operating Voltage	VDC	3-20
*Rated Current (Max)	mA	15
*Min Sound Output at 30cm	dB	95
*Resonant Frequency	Hz	3500±500
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	7.3
Housing Material		ABS757
Tone Nature		Single
Lead Wire		UL1095 AWG28 ( Red & Black )
QTY per Tape / Reel (Blister Gurte)	pcs	

\* Value Applying at Rated Voltage(DC)

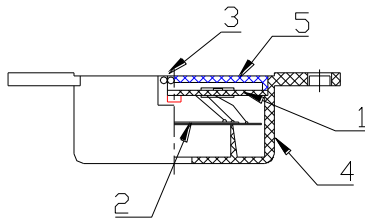

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)