

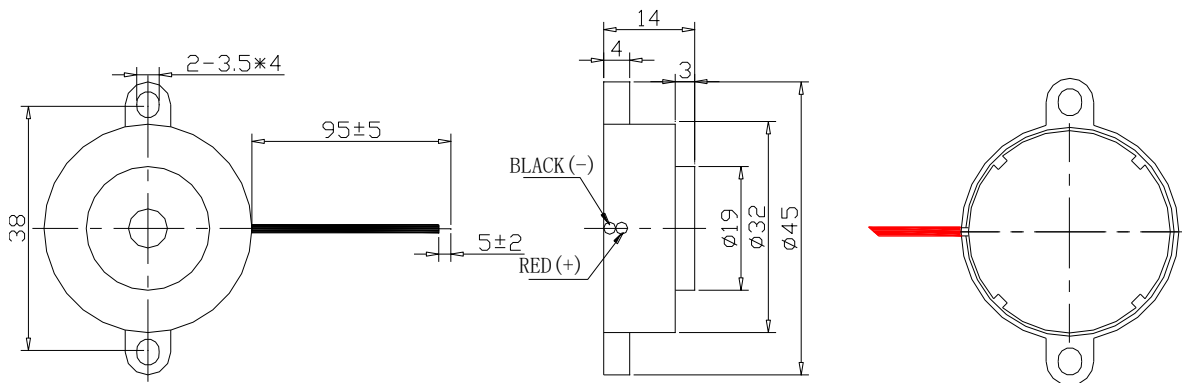


SGNU-UGPA32AX		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	φ32*14
Rated Voltage (Square Wave)	VDC	12
Operating Voltage	VDC	3-28
*Rated Current (Max)	mA	15
*Min Sound Output at 30cm	dB	87
*Resonant Frequency	Hz	3900±500
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	8
Housing Material		White ABS
Tone Nature		Single
Lead Wire		UL1095 AWG26 (Red & Black)
QTY per Tape / Reel (Blister Gurte)	pcs	

* Value Applying at Rated Voltage(DC)



Unless otherwise specified: Tolerance : \pm 0.5 (Unit: mm)

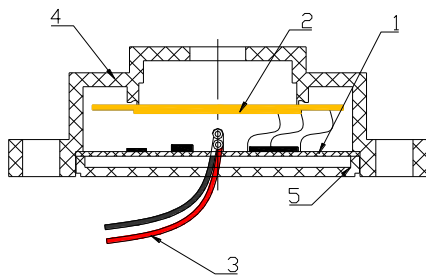