
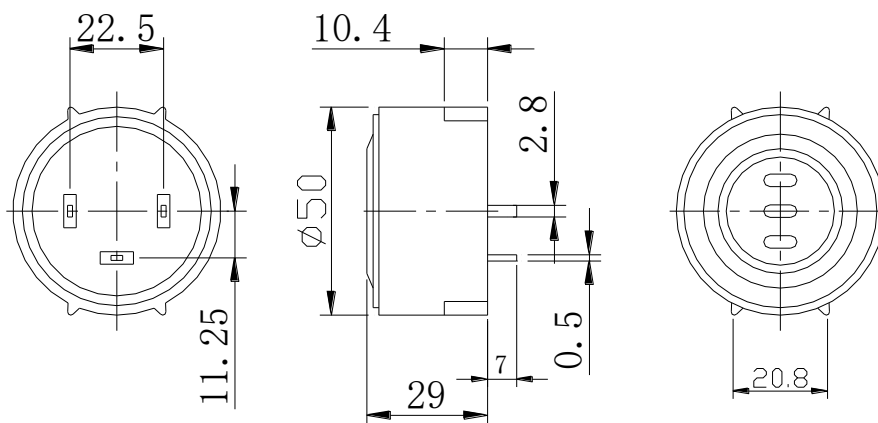


SGNU-UGPA50AX		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	φ50*29
Rated Voltage (Square Wave)	V	12
Operating Voltage	V	5-13
*Rated Current (Max)	mA	75
*Min Sound Output at 25.4 cm	dB	105
*Resonant Frequency	Hz	2500±500
Operating Temperature	°C	-20~+60
Storage Temperature	°C	-30~+70
Weight	g	28
Housing Material		ABS(Black)
Tone Nature		Single
Lead Pin Material		Phosphor Bronze
QTY per Tape / Reel (Blister Gurte)	pcs	

* Value Applying at Rated Voltage(DC)



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)