
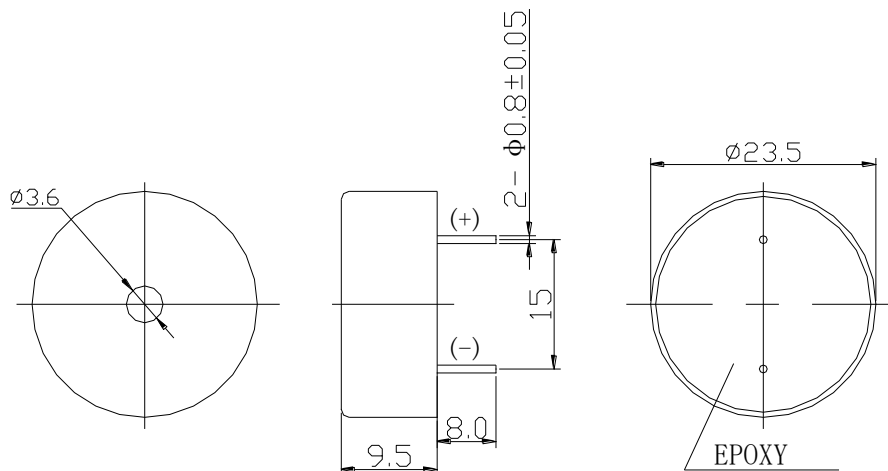


<b>SGNU-UGPM24AX</b>		
<b>ITEM</b>	<b>UNIT</b>	<b>SPECIFICATION</b>
Dimensions	mm	φ23.5*9.5
Rated Voltage (Square Wave)	VDC	12
Operating Voltage	VDC	3-20
*Rated Current (Max)	mA	20
* Min Sound Output at 10cm	dB	95
*Resonant Frequency	Hz	3400±500
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-40~+85
Weight	g	4
Housing Material		MPPO (Black)
Tone Nature		Single
Lead Pin Material		Red Copper (DSn)
QTY per Tape / Reel (Blister Gurte)	pcs	

\* Value Applying at Rated Voltage(DC)



Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)