
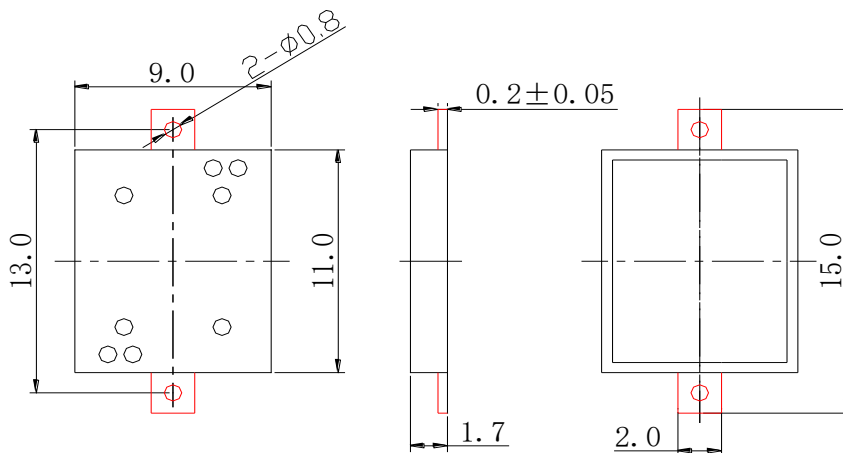


SGNU-UGPT119A		
ITEM	UNIT	SPECIFICATION
Dimensions	mm	11*11*1.7
Rated Voltage (Square Wave)	Vp-p	5
Operating Voltage	Vp-p	1-25
*Rated Current (Max)	mA	3
*Min Sound Output at 4.1kHz/10cm	dB	70
*Resonant Frequency	Hz	4100
Capacitance at 120Hz	pF	13000±30%
Operating Temperature	°C	-40~+85
Storage Temperature	°C	-40~+85
Weight	g	0.2
Housing Material		LCP
Tone Nature		Single
Connection		SMD
QTY per Tape / Reel (Blister Gurte)	pcs	2000

*Value Applying at Rated Voltage (resonant frequency , 1/2 duty , square wave)

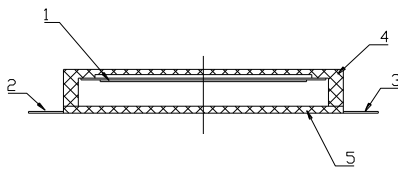

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)