


<b>SGNU-UGPT16BM</b>		
<b>ITEM</b>	<b>UNIT</b>	<b>SPECIFICATION</b>
Dimensions	mm	16*16*2.5
Rated Voltage (Square Wave)	Vp-p	3
Operating Voltage	Vp-p	3-20
*Rated Current (Max)	mA	5
*Min Sound Output at 4.0kHz/10cm	dB	75
*Resonant Frequency	Hz	4000
Capacitance at 120Hz	pF	16000±30%
Operating Temperature	°C	-40~+85
Storage Temperature	°C	-40~+85
Weight	g	0.9
Housing Material		LCP
Tone Nature		Single
Lead Pin Material		Brass(DSn)
Connection		SMD
QTY per Tape / Reel (Blister Gurte)	pcs	

\*Value Applying at Rated Voltage ( resonant frequency , 1/2 duty , square wave )

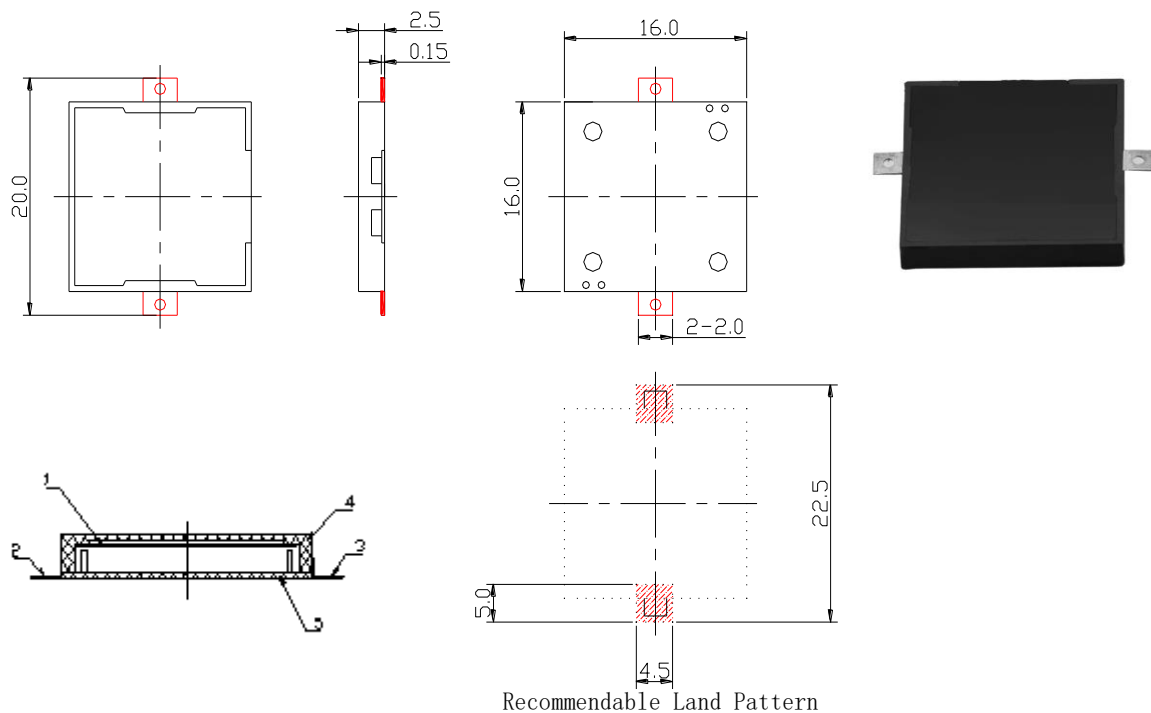

Unless otherwise specified: Tolerance :± 0.5 (Unit: mm)