



SVHJ-A1006 SERIES
1.0mm pitch
Wire to board connector
Housing

SVHJ – A1006H - xxP

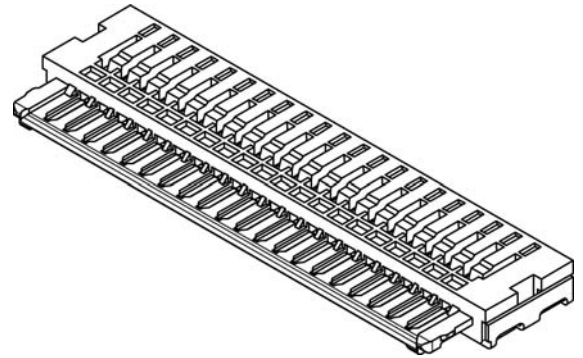

Specification

| | |
|-----------------------|-------------------------------|
| Current Rating | 1A AC / DC |
| Voltage Rating | 200V AC / DC |
| Temperature Range | -25°C ~ +85°C |
| Contact Resistance | 40mΩ Max. |
| Insulation Resistance | 100MΩ Min. |
| Withstanding Voltage | 500V AC/minute |
| Shell | Phosphor Bronze/Nickel-plated |
| Material | Nylon 46, UL94V-0 |
| Color | Natural (Beige) |

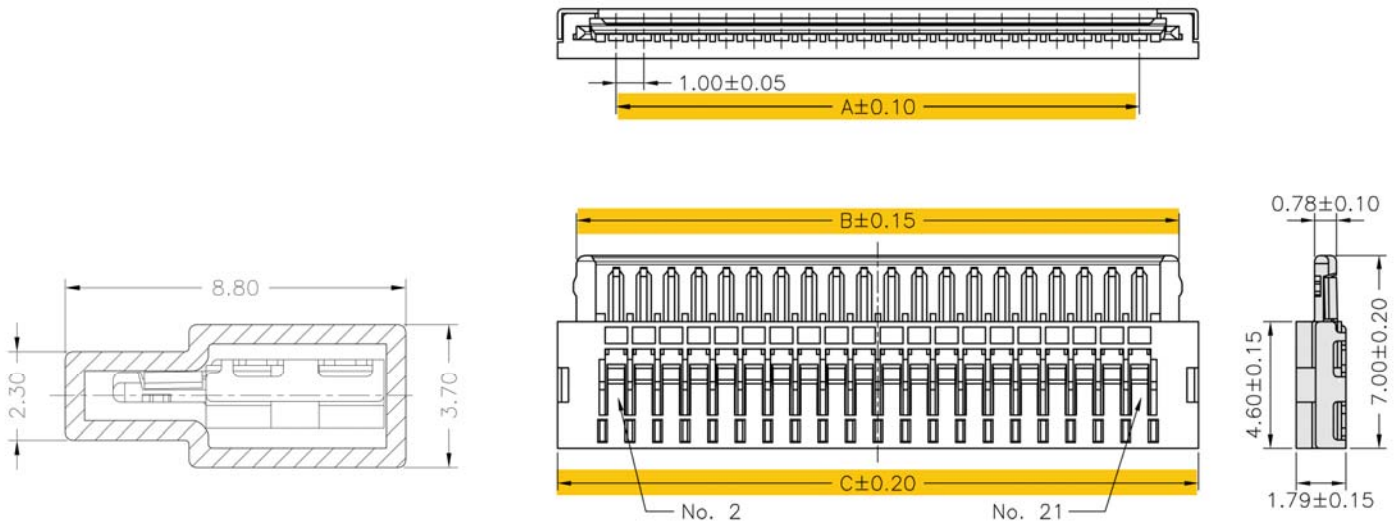

Ordering Information & Dimensions

| SVHJ - F1006H - xxP | Dimensions (mm) | | |
|---------------------|-----------------|-------|-------|
| | A | B | C |
| SVHJ - F1006H – 20P | 19.00 | 21.88 | 23.28 |
| SVHJ - F1006H - 30P | 29.00 | 31.88 | 33.28 |

P = Pin