



SVHJ-A1252 SERIES
1.25mm pitch
Single Row Housing

SVHJ – A1252H - xxP

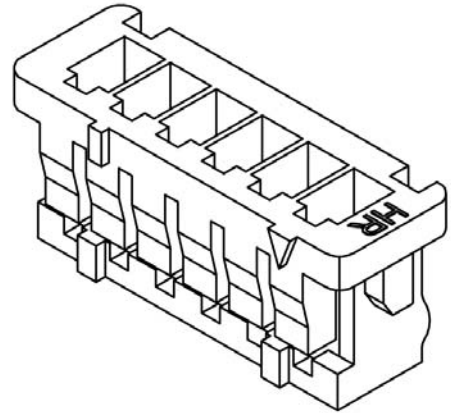

Specification

Current Rating	1A AC / DC
Voltage Rating	150V AC / DC
Temperature Range	-25°C ~ +85°C
Contact Resistance	30mΩ Max.
Insulation Resistance	500MΩ Min.
Withstanding Voltage	500V AC/minute
Material	Nylon 66, UL94V-0
Color	7529C ~ 7530C

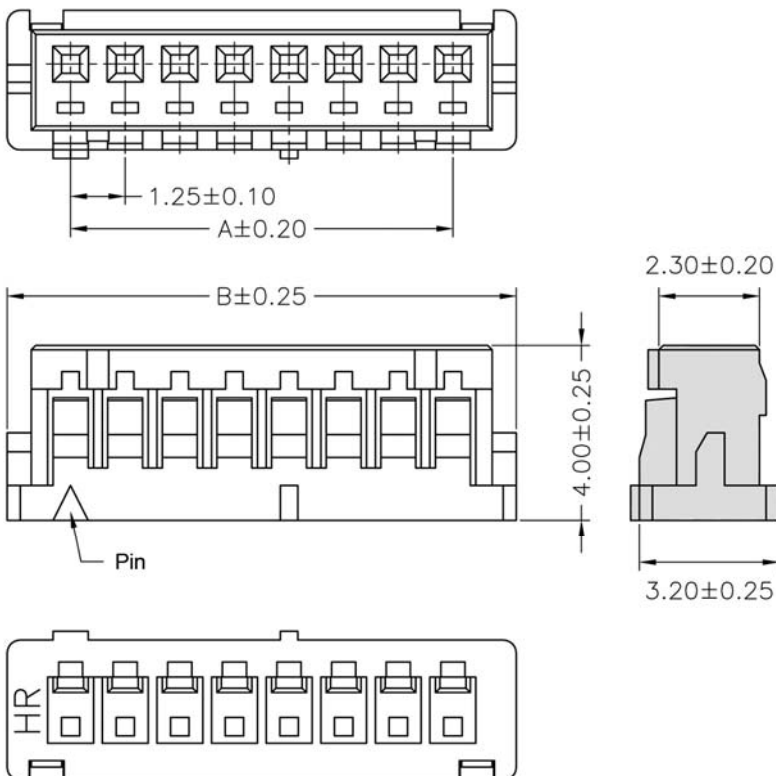

Ordering Information & Dimensions

SVHJ – A1252H - xxP	Dimensions (mm)	
	A	B
SVHJ - A1252H - 2P	1.25	4.15
SVHJ - A1252H - 3P	2.50	5.40
SVHJ - A1252H - 4P	3.75	6.65
SVHJ - A1252H - 5P	5.00	7.90
SVHJ - A1252H - 6P	6.25	9.15
SVHJ - A1252H - 7P	7.50	10.40
SVHJ - A1252H - 8P	8.75	11.65
SVHJ - A1252H - 9P	10.00	12.90
SVHJ - A1252H - 10P	11.25	14.15
SVHJ - A1252H - 11P	12.50	15.40
SVHJ - A1252H - 12P	13.75	16.65
SVHJ - A1252H - 13P	15.00	17.90
SVHJ - A1252H - 14P	16.25	19.15
SVHJ - A1252H - 15P	17.50	20.40

P = Pin