



SVHJ-A1253 SERIES
1.25mm pitch
Right-Angle Socket with
Polarizing Peg - SMT Type
Ultra Low Profile

SVHJ – A1253WRSF - xxP

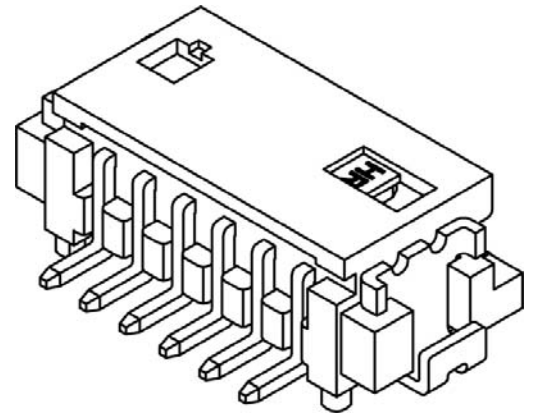

Specification

Current Rating	1A AC / DC
Voltage Rating	150V AC / DC
Temperature Range	-25°C ~ +85°C
Contact Resistance	30mΩ Max.
Insulation Resistance	500MΩ Min.
Withstanding Voltage	500V AC/minute
Pin Material	Brass / Tin-plated
Solder Tabs	Brass / Tin-plated
Material	Nylon 66, UL94V-0
Color	Natural (Beige)

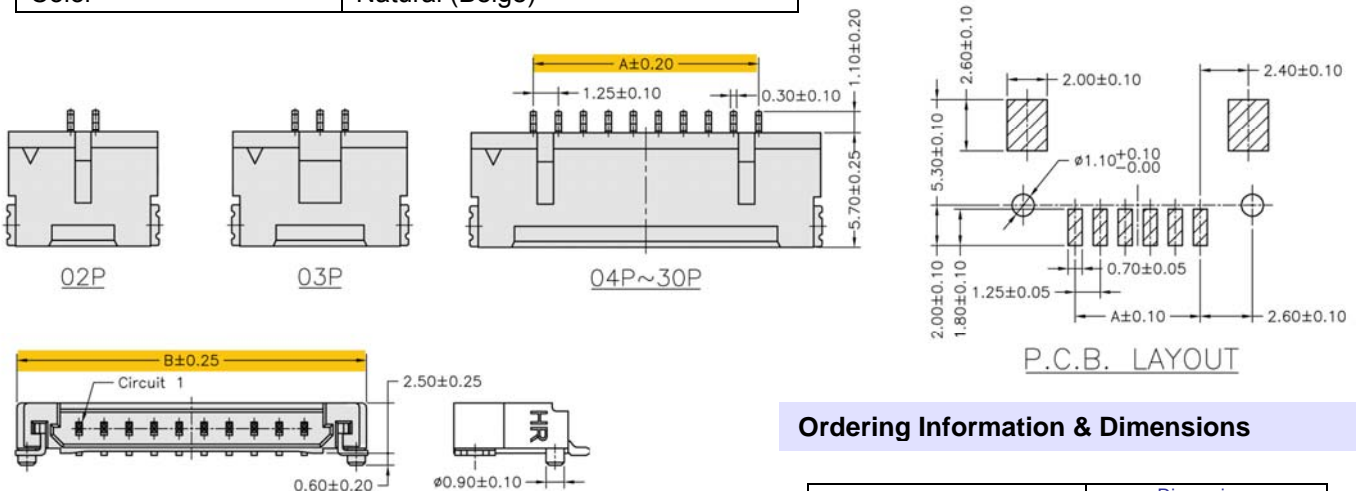

Ordering Information & Dimensions

SVHJ - A1253WRSF - xxP	Dimensions	
	A	B
SVHJ - A1253WRSF - 2P	1.25	7.25
SVHJ - A1253WRSF - 3P	2.50	8.70
SVHJ - A1253WRSF - 4P	3.75	9.95
SVHJ - A1253WRSF - 5P	5.00	11.20
SVHJ - A1253WRSF - 6P	6.25	12.45
SVHJ - A1253WRSF - 7P	7.50	13.70
SVHJ - A1253WRSF - 8P	8.75	14.95
SVHJ - A1253WRSF - 9P	10.00	16.20
SVHJ - A1253WRSF - 10P	11.25	17.45
SVHJ - A1253WRSF - 11P	12.50	18.70
SVHJ - A1253WRSF - 12P	13.75	19.95
SVHJ - A1253WRSF - 13P	15.00	21.20
SVHJ - A1253WRSF - 14P	16.25	22.45
SVHJ - A1253WRSF - 15P	17.50	23.70
SVHJ - A1253WRSF - 20P	23.75	29.95
SVHJ - A1253WRSF - 21P	25.00	31.20
SVHJ - A1253WRSF - 25P	30.00	36.20
SVHJ - A1253WRSF - 30P	36.25	42.45

P = Pin