

Metal Push Button HBGQ22M

Order-Code:

DIOH-GQ22M - 10 Δ / \blacktriangle / \star


Δ	\blacktriangle	\star
Farbe LED Color LED	Betriebsspannung LED Lamp Voltage (VDC / AC)	Farbe Druckhaube
R: Rot / Red G: Grün / Green Y: Gelb / Yellow O: Orange B: Blau / Blue W: Weiß / White	6 12 24 36 110 220	R: Rot / Red G: Grün / Green Y: Gelb / Yellow B: Blau / Blue W: Weiß / White N: Schwarz / Black

Frontshape	Mushroom	
Terminal Type	Screw Terminal J: Pin Terminal	
Switch Type	Two Terminal breakpoints slow moving contact	
Switch Specifications	Ith: 2A Ui: 36VDC	
Contact Resistance (m Ω)	≤ 50	
Insulation Resistance (M Ω)	≥ 1000	
Dielectric Strength (VAC)	2000	
Operating Temperature	-20°C ~ +55°C	
Mechanical Life (times)	> 1.000.000	
Electrical Life (times)	> 200.000	
Panel Thickness (mm)	1 ~ 10	
Tonque (Nm)	5 ~ 14	
Operating Pressure (N)	~ 4	
Operating Stroke (mm)	~ 1.5	
Protection Degree	IP65, IK08	
Material	Contact	Silver Alloy
	Button	Zn-Al Alloy (Color)
	Case	Zn-Al Alloy (Silver White)
	Base	PBT

DIOH-GQ22M- Δ / \blacktriangle / \star



Screw Terminal

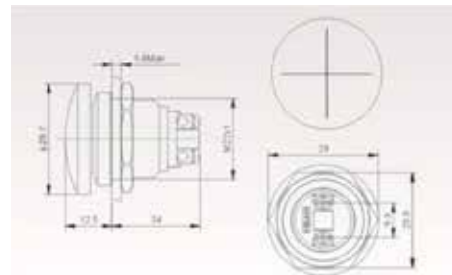

DIOH-GQ22M - 10/J/ \star



Pin Terminal

