


REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	NOTE
	INITIAL RELEASE	10/18/07		ECN-07101801
△				
△				
△				

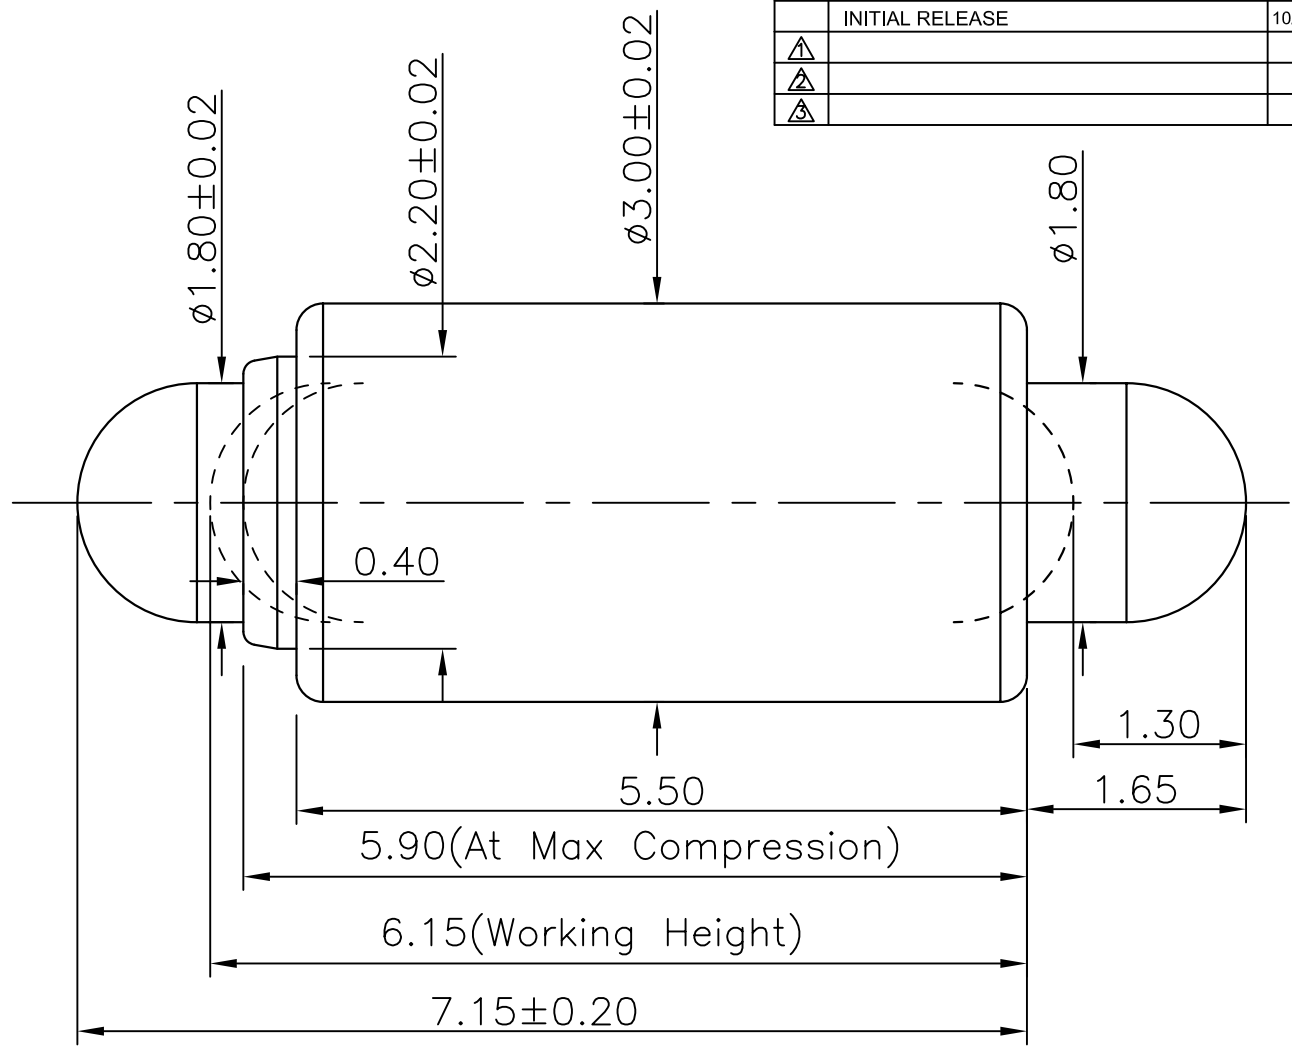

1. Material
 - .Plunger : Brass 3604
 - .Barrel : Brass 3604
 - .Spring : SUS304
2. Plating
 - .Contact Surface : 10 μ" minimum Au Over 50~100 μ" minimum Ni
3. Electrical
 - .Rated Current & Voltage : DC 12 V ; 1 A
 - .Contact Resistance : 50 mΩ maximum at Working Height(Quiescence)
4. Mechanical
 - .Unloaded Height : 7.15 mm
 - .Working Height : 6.15 mm
 - .Spring Force : 100 g±20% at 1.00mm Working Stroke
 - .Durability: 10000 cycles

DRAWN		SCALE: 12.5/1
CHECKED		SHEET: 1 OF 1
APPROVED		DATE: 09/14/07
DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X ± .10 ± 2.0° X.X ± .05 ± 1.0° X.XX ± .02 ± 0.5°		
UNIT : mm		
FILE PATH:		

N&H Technology GmbH

TITLE: Pogo Pin **SVPC-D-H202M0**

SIZE A4		DRAWING NO. H202M0	REV. A0
------------	--	-----------------------	------------