

4


3

2

1

Please Approve this Drawing	
Date	
Signature	

			DATE
			2019/05/08

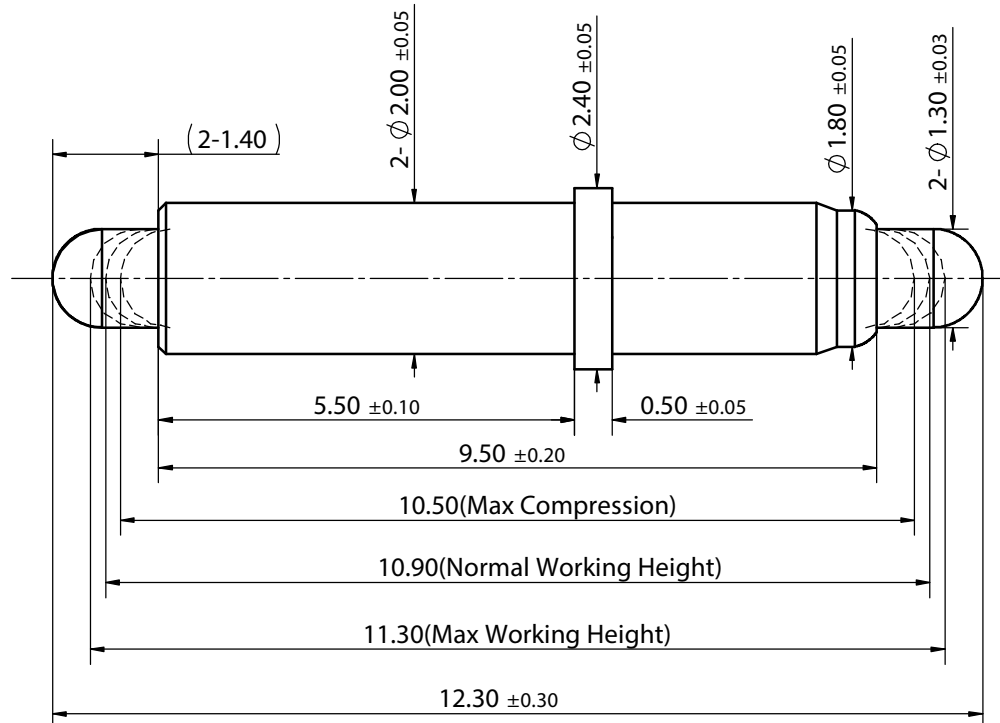

NOTE:

- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
- 2.Plating
Plunger: 10 micro-inch minimum Au over 50~120 micro-inch nickel
Barrel : 10 micro-inch minimum Au over 50~120 micro-inch nickel
- 3.Electrical
Rated current & voltage: DC12V; 1A .
Contact resistance:50 mohm maximum at working height(quiescence)
- 4.Mechanical
Spring force: 110g±20% at Normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operate it based on the working height
Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.RoHS & HF complied product.

DRAW		SCALE	10:1	UNIT	mm	DRAWING NO.	P07732DH1
COUNTER SIGN	N/A	SHEET	1 of 1	PROJECT		MATERIAL	
AUDIT		DATE	2019/5/9	VER	D.0	TITLE	Pogo pin
APPROVE	-	PLATE	Seeing notes				

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH ANGLE

0~6.0	±0.05mm	0. ±2.0°
>6~30	±0.10mm	0.0 ±1.0°
>30~120	±0.15mm	0.00 ±0.50°

N&H Technology GmbH

SVPC-D-P07732DH1

4

3

2

1