



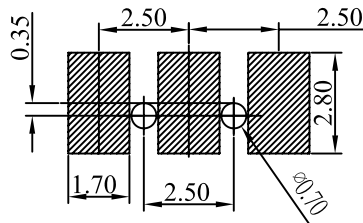



PART No. SVPC-R-H003M2-H03BRR



NOTE:

1. Material
 Housing Black PA9T+30% GF(UL94V-0)
 Plunger & Barrel : Brass 3604
 Spring : SUS 304
2. Plating
 Contact Surface : 10u" minimum Au over
 50~100u"Ni
3. Electrical
 Rated Current & Voltage : DC 12V;1A
 Contact Resistance : 50 mΩ maximum
 at Working Height.(Quiescence)
4. Mechanical
 Unloaded Height : 4.90 mm
 Working Height : 3.90 mm
 Minimum Height : 3.50 mm
 Spring Force : 120g ±20% at Working Height
 Durability :10000 cycles (minimum)

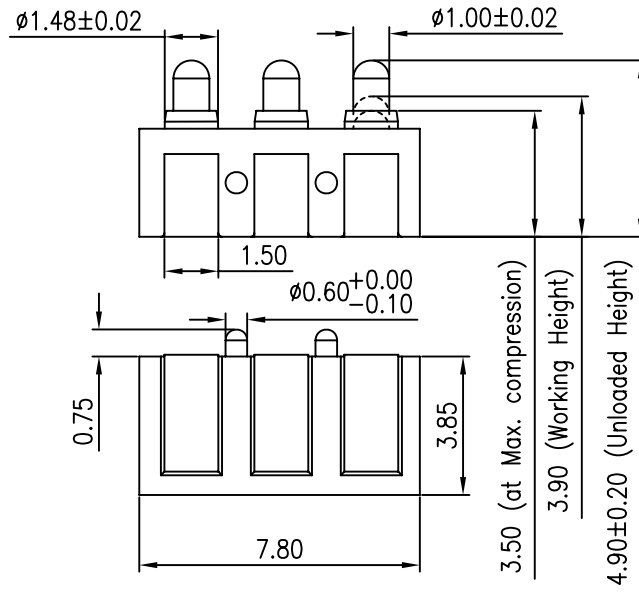

Recommended P.C.B.
 Layout(Component Side)

DRAWN		SCALE: 2.5 : 1	N&H Technology GmbH	
CHECKED		SHEET: 1 OF 1		
APPROVED		DATE: 06/10/16	TITLE:	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		Pitch 2.5mm Height 4.9mm	SVPC-R-H003M2-H03BRR	
UNIT : mm			SIZE A4	DRAWING NO. H003M2-H03BRR
FILE PATH:				REV. A.0