

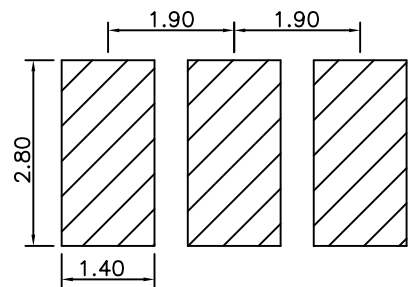
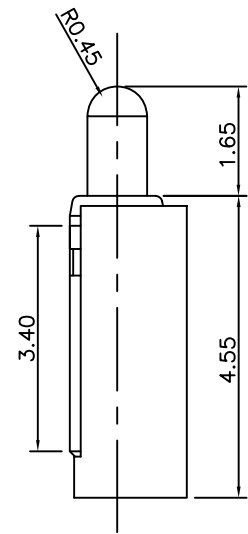


PART No. SVPC-R-H016M2-H03ARR

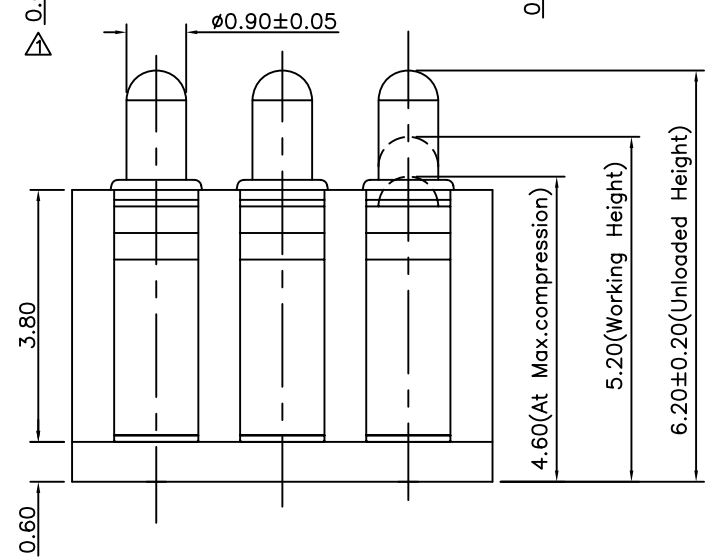

NOTE:

1. Material
 Housing Black LCP+30% GF
 Plunger & Barrel : Brass
 Spring : SUS 304
2. Plating
 Contact Surface : 10u" minimum Au over
 50~100u"Ni
3. Electrical
 Rated Current & Voltage : DC 12V;1A
 Contact Resistance : 50 mΩ maximum
 at Working Height.(Quiescence)
4. Mechanical
 Unloaded Height : 6.20mm
 Working Height : 5.20mm
 Minimum Height :4.60mm
 Spring Force : 110g ±20% at Working Height
 Durability :10000 cycles (minimum)

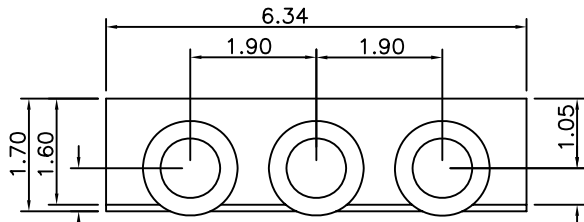

REFERENCE LAND PATTERN

Please Approve this Drawing	
Date	
Signature	

DRAWN		SCALE: 2.5 : 1	N&H Technology GmbH	
CHECKED		SHEET: 1 OF 2		
APPROVED		DATE 03/22/07	TITLE: SVPC-R-H016M2-H03ARR	
DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ± .25 .X.X ± .15 .X.XX ± .10		Height 6.20mm Pitch 1.90mm	3-Pos Pogo Pin Connector	
UNIT : mm			SIZE A4	DRAWING NO. H016M2-H03ARR
FILE PATH:				REV. A.1