



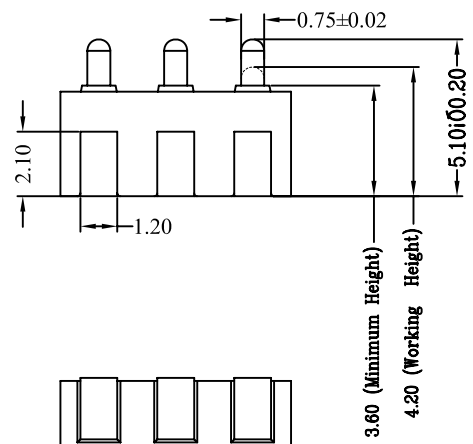


- Material
 - Housing Black PA9T+30% GF(UL94V-0)
 - Plunger & Barrel : Brass 3604
 - Spring : SUS 304
- Plating
 - Contact Surface : 10u" minimum Au over 50~100u"Ni
- Electrical
 - Rated Current & Voltage : DC 12V;1A
 - Contact Resistance : 50 mΩ maximum at Working Height.(Quiescence)
- Mechanical
 - Unloaded Height : 5.1mm
 - Working Height : 4.2mm
 - Minimum Height : 3.6mm
 - Spring Force : 80g ±20% at Working Height
 - Durability : 10000 cycles (minimum)



DRAWN		SCALE: 2.5 : 1
CHECKED		SHEET: 1 OF 1
APPROVED		DATE: 03/13/07
DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ± .20 X.X ± .10 X.XX ± .1 UNIT : mm		ANGLSES ± 2.0° ± 1.0° ± 0.5°
FILE PATH:		Pitch 2.5mm Height 5.1mm

N&H Technology GmbH	
TITLE. SVPC-R-H050M0-H03ARR	
3-Pos Pogo Pin Connector	
SIZE A4	DRAWING NO. H050M0-H03ARR
	REV. A.0