


Plug-In Pogo Pin SVPC-P-N165M0

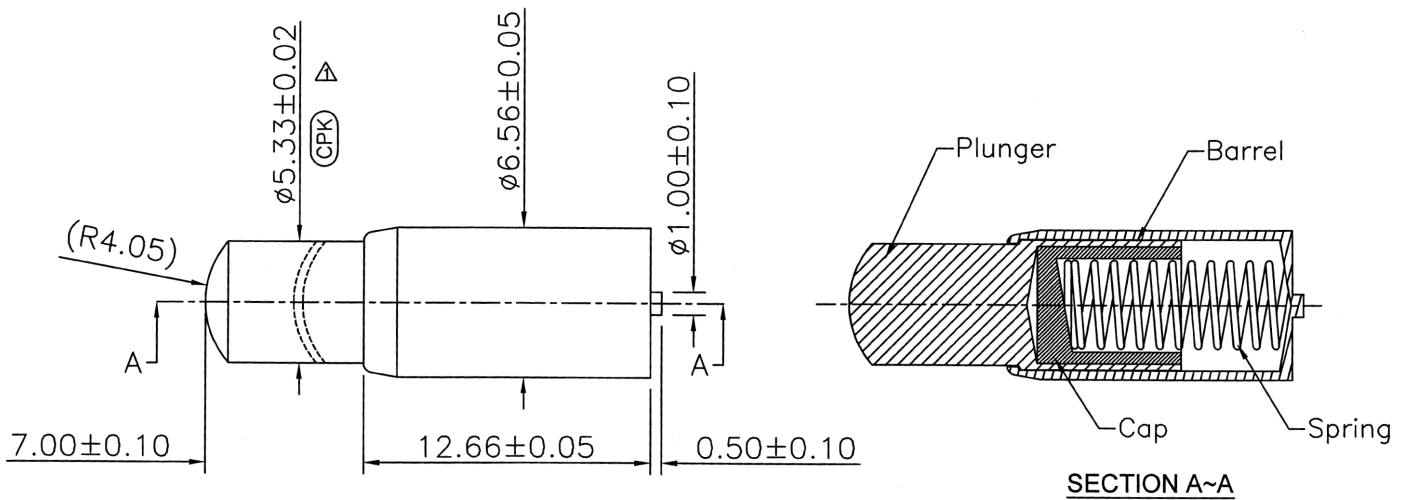

Dimension: mm

NOTE:

1.Material

Plunger: Brass
Barrel: Brass
Spring: SUS304
Cap: Black HTN (UL94V-0)

2.Plating

Contact surface: 50 ~ 100 μ "Ni

3.Electrical

Rated current & voltage: DC 16V; 5A Max.

4.Mechanical

Full Stroke: 4.00mm
Spring force: 500g \pm 20% at 3.60 mm Stroke

5. To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

