

4

3

2

1


REVISIONS

No.	DESCRIPTION	DCN No.	DATE
	INITIAL RELEASE	DCN-20130423	2013.04.11
△			

Please Approve
This Drawing

Date

Signature

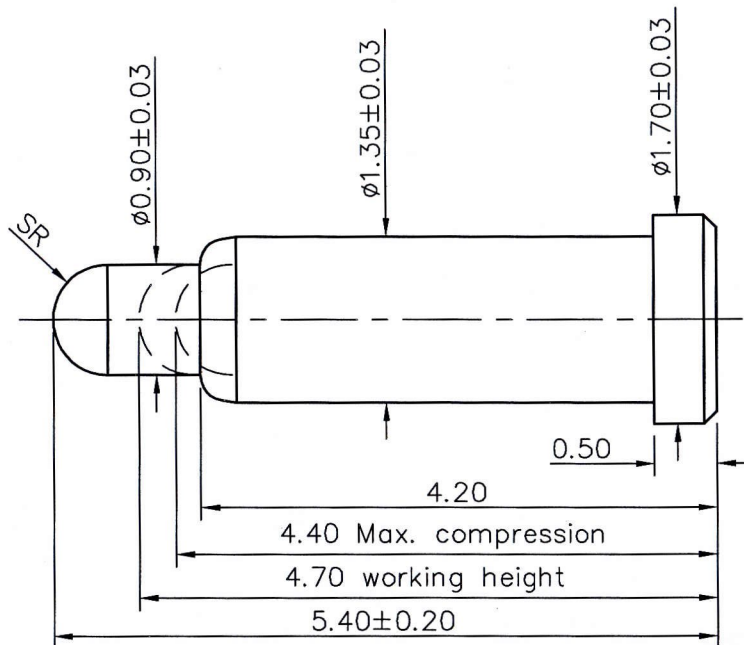

NOTE;

1.Material

Barrel & Plunger: Brass C3604

Spring: SUS304

2.Plating

Plunger: 30 micro inch minimum Au over 50~100 micro inch Ni

Barrel: 30 micro inch minimum Au over 50~100 micro inch Ni

3.Electrical

Rated current & voltage: DC12V;8A Max.(quiescence).

Contact resistance: 30 mohm Max. at working height(quiescence)

4.Mechanical

Spring force: 90g±20g at normal working height(quiescence).

Durability: 10,000 cycles(minimum)

5. To avoid arcing issue, The adaptor start to power supply after connector mated fully.

6.To ensure the best usage,please operate it based on the working height.

7.RoHS and HF compliant product.

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	F1911AA03
CHECKED	林玉秀	SHEET:	1 of 1	PROJECT		TITLE:	
APPROVED	Jamydi3	DATE:	2013.04.11	VER.	D.0	Pogo Pin	
THE UNMARKED TOLERANCE ARE AS BELOW :				N&H Technology GmbH			
LENGTH		ANGLE					
0~6.0	±0.05mm	0.	±2.0°	SVPC-F-F1911AA03			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				

4

3

2

1