


Please Approve this Drawing

Date	2018.10.9
Signature	<i>[Signature]</i>

REVISIONS (修正)			
NO. (序号)	DESCRIPTION (描述)	DCN NO. (变更号)	DATE (日期)
D.0	NEW RELEASE	DCN-20181006	2018.09.28

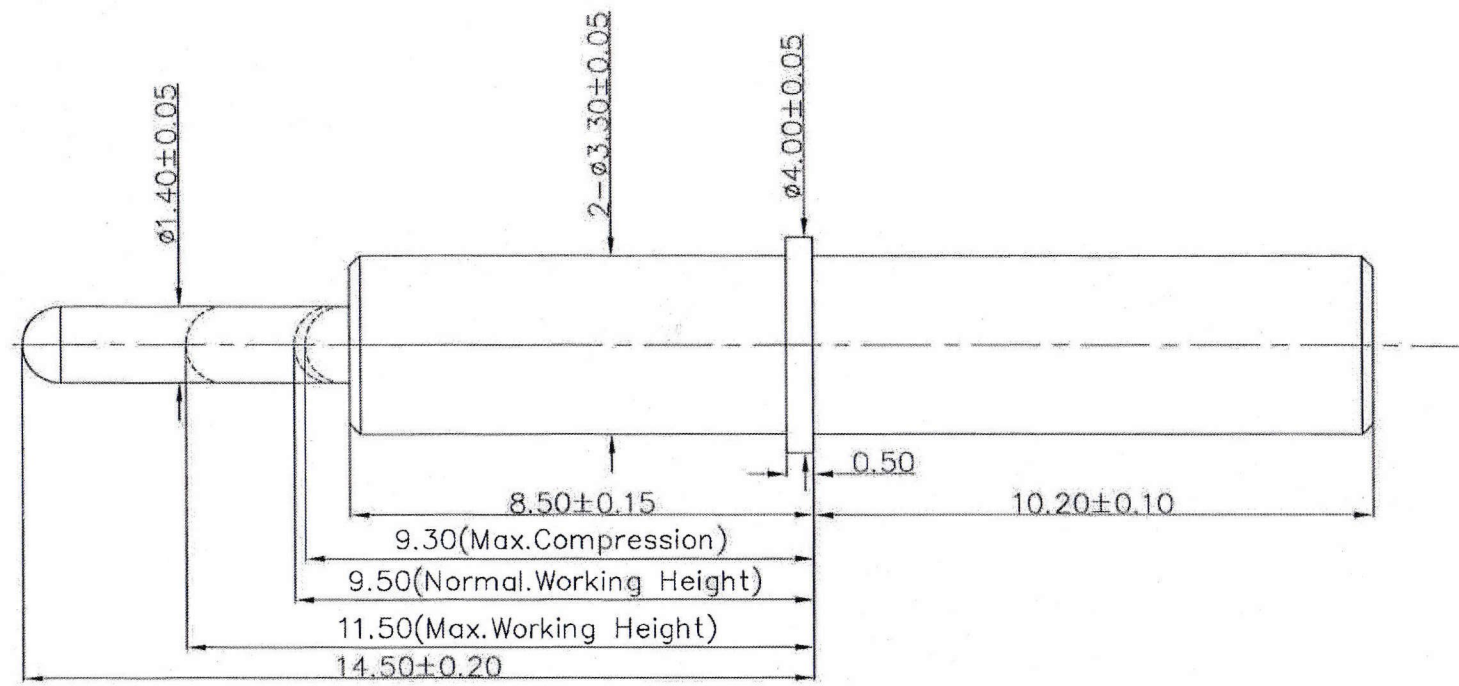

NOTE:

- Material
 - Plunger: brass
 - Barrel: brass
 - Spring&Ball: SUS
- Plating
 - Plunger: 20 micro-inch minimum Au over 50~120 micro-inch nickel
 - Barrel: 20 micro-inch minimum Au over 50~120 micro-inch nickel
 - Ball: 5 micro-inch minimum Au over 50~120 micro-inch nickel
- Electrical
 - Rated current & voltage: DC12V; 12A.
 - Contact resistance: 50 mohm maximum at working height(quiescence)
- Mechanical
 - Spring force: 150g±20% at Normal working height
 - Durability: 10,000 cycles(minimum)
- To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
- RoHS & HF complied product.

DRAW (绘图)	王云	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P07408PH1
COUNTER SIGN (会签)		SHEET (张数)	1 of 1	PROJECT (项目编号)		MATERIAL (材料)	Seeing notes (见备注)
AUDIT (审核)	<i>[Signature]</i>	DATE (日期)	2018.09.28	VER (版本)	D.0	TITLE (品名)	Pogo pin
APPROVE (核准)	<i>[Signature]</i>	PLATE (版数)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW:
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0	±2.0'
>6~30	±0.10mm	0.0	±1.0'
>30~120	±0.15mm	0.00	±0.50'

N&H Technology GmbH

SVPC-P-P07408PH1