


Please Approve this Drawing	
Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201901035	2019/01/09

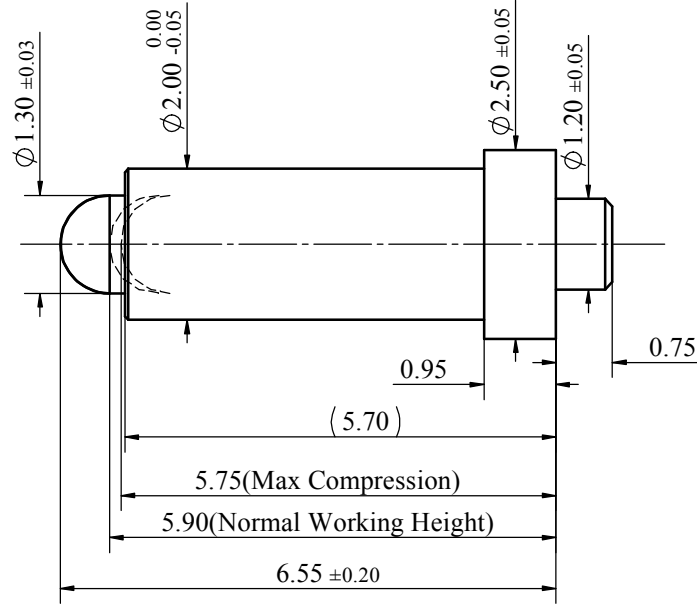

NOTE:

1.Material

Plunger: Brass
 Barrel: Brass
 Spring: SUS

2.Plating

Plunger: 10 micro-inch minimum Au over 50~120 micro-inch nickel
 Barrel : 10 micro-inch minimum Au over 50~120 micro-inch nickel

3.Electrical

Rated current & voltage: DC12V; 10A.
 Contact resistance: 30 mohm maximum at working height(quiescence)

4.Mechanical

Spring force: 100g±20% at Normal working height
 Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height

Based on the engineering drawings,shall not exceed the maximum allowed compression

6.RoHS & HF complied product.

DRAW (设计)	贺志鹏	SCALE (比例)	10:1	UNIT (单位)	mm	DRAWING NO. (图号)	P07567PH2
COUNTER SIGN (会签)	N/A	SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	N/A
AUDIT (审核)	肖大庭	DATE (日期)	2019/1/10	VER (版次)	D.0	TITLE (品名)	Pogo pin Conn.
APPROVE (核准)	肖大庭	PLATE (镀层)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)				ANGLE (角度)			
0~6.0 ±0.05mm 0.0 ±2.0°							
>6~30 ±0.10mm 0.0 ±1.0°							
>30~120 ±0.15mm 0.00 ±0.50°							
N&H Technology GmbH							
SVPC-P-P07567PH2							